

Hazard Mitigation Plan Appendix

Appendix A	Resolutions from Carroll County and Cities
Appendix B	Public Participation Strategy <ul style="list-style-type: none">• List of Meetings• Hazard Mitigation Plan Steering Committee Meeting Notes and Sign-In Sheets• Public Hearing Notes and Sign-In Sheets• Press Releases• Hazards Survey• Social Media
Appendix C	Critical Facilities List
Appendix D	Hazard Risk Analyses: Supplement to the Carroll County Joint Hazard Mitigation Plan
Appendix E	County Economy and Transportation <ul style="list-style-type: none">• 2014 Carroll Chamber of Commerce Community Profile• Area Profile Georgia Department of Labor• 2014 Long Range Transportation Plan
Appendix F	Local Weather Data from National Climate Data Center
Appendix G	Commodity Flow Study (2008)
Appendix H	Haz Mat Emergency Log
Appendix I	STAPLEE Worksheets
Appendix J	Regional Outreach
Appendix K	Southern Wildfire Risk Assessment
Appendix L	3A Worksheets

Southern WILDFIRE RISK ASSESSMENT SUMMARY REPORT



Carroll County



Report was generated using
www.southernwildfirerisk.com

Report version: 4.0

Report generated: 12/18/2019

Table of Contents

Hold Control and Click to navigate to the section of your interest.

[Disclaimer](#)

[Introduction](#)

[Wildland Urban Interface](#)

[WUI Risk Index](#)

[Community Protection Zones](#)

[Burn Probability](#)

[Fire Behavior](#)

[Characteristic Rate of Spread](#)

[Characteristic Flame Length](#)

[Characteristic Fire Intensity Scale](#)

[Fire Type - Extreme](#)

[Surface Fuels](#)

[Dozer Operability Rating](#)

[References](#)

Disclaimer

Southern Group of State Foresters makes no warranties or guarantees, either expressed or implied as to the completeness, accuracy, or correctness of the data portrayed in this product nor accepts any liability, arising from any incorrect, incomplete or misleading information contained therein. All information, data and databases are provided “As Is” with no warranty, expressed or implied, including but not limited to, fitness for a particular purpose.

Users should also note that property boundaries included in any product do not represent an on-the-ground survey suitable for legal, engineering, or surveying purposes. They represent only the approximate relative locations.

Introduction

Welcome to the Southern Wildfire Risk Assessment Summary Report.

This tool allows users of the Professional Viewer application of the Southern Wildfire Risk Assessment (SWRA) web Portal (SouthWRAP) to define a specific project area and summarize wildfire related information for this area. A detailed risk summary report is generated using a set of predefined map products developed by the Southern Wildfire Risk Assessment project which have been summarized explicitly for the user defined project area. The report is generated in MS WORD format.

The report has been designed so that information from the report can easily be copied and pasted into other specific plans, reports, or documents depending on user needs. Examples include, but are not limited to, Community Wildfire Protection Plans, Local Fire Plans, Fuels Mitigation Plans, Hazard Mitigation Plans, Homeowner Association Risk Assessments, and Forest Management or Stewardship Plans. Formats and standards for these types of reports vary from state to state across the South, and accordingly SouthWRAP provides the SWRA information in a generic risk report format to facilitate use in any type of external document. The SouthWRAP Risk Summary Report also stands alone as a viable depiction of current wildfire risk conditions for the user defined project area.

SouthWRAP provides a consistent, comparable set of scientific results to be used as a foundation for wildfire mitigation and prevention planning in the South.

Results of the assessment can be used to help prioritize areas in the state where mitigation treatments, community interaction and education, or tactical analyses might be necessary to reduce risk from wildfires.



The SouthWRAP products included in this report are designed to provide the information needed to support the following key priorities:

- Identify areas that are most prone to wildfire
- Identify areas that may require additional tactical planning, specifically related to mitigation projects and Community Wildfire Protection Planning
- Provide the information necessary to justify resource, budget and funding requests
- Allow agencies to work together to better define priorities and improve emergency response, particularly across jurisdictional boundaries
- Define wildland communities and identify the risk to those communities
- Increase communication and outreach with local residents and the public to create awareness and address community priorities and needs
- Plan for response and suppression resource needs
- Plan and prioritize hazardous fuel treatment programs

To learn more about the SWRA project or to create a custom summary report, go to www.southernwildfirerisk.com.

Products

Each product in this report is accompanied by a general description, table, chart and/or map. A list of available SouthWRAP products in this report is provided in the following table.

SouthWRAP Product	Description
Wildland Urban Interface (WUI)	Depicts where humans and their structures meet or intermix with wildland fuel
WUI Risk Index	Represents a rating of the potential impact of a wildfire on people and their homes
Community Protection Zones	Represents those areas designated as primary and secondary priorities for community protection planning
Burn Probability	Probability of an area burning given current landscape conditions, percentile weather, historical ignition patterns and historical fire prevention and suppression efforts
Characteristic Rate of Spread	Represents the speed with which a fire moves in a horizontal direction across the landscape
Characteristic Flame Length	Represents the distance between the tip and base of the flame
Characteristic Fire Intensity Scale	Quantifies the potential fire intensity for an area by orders of magnitude
Fire Type - Extreme	Represents the potential fire type (surface or canopy) under extreme percentile weather conditions
Surface Fuels	Contains the parameters needed to compute surface fire behavior characteristics
Dozer Operability Rating	Level of difficulty to operate a dozer in an area based on limitations associated with slope and vegetation type

Wildland Urban Interface

Description

The South is one of the fastest growing regions in the nation, with an estimated population growth of 1.5 million people per year. The South also consistently has the highest number of wildfires per year. Population growth is pushing housing developments further into natural and forested areas where most of these wildfires occur. This situation puts many lives and communities at risk each year.



In particular, the expansion of residential development from urban centers out into rural landscapes, increases the potential for wildland fire threat to public safety and the potential for damage to forest resources and dependent industries. This increase in population across the region will impact counties and communities that are located within the Wildland Urban Interface (WUI).

The WUI is described as the area where structures and other human improvements meet and intermingle with undeveloped wildland or vegetative fuels. Population growth within the WUI substantially increases the risk from wildfire.

For the **Carroll County** project area, it is estimated that **106,493** people or **96.4 % percent** of the total project area population (**110,508**) live within the WUI.



The Wildland Urban Interface (WUI) layer reflects housing density depicting where humans and their structures meet or intermix with wildland fuels.

WUI housing density is categorized based on the standard Federal Register and U.S. Forest Service SILVIS data set categories, long considered a de facto standard for depicting WUI. However, in the SWRA WUI data the number of housing density categories is extended to provide a better gradation of housing distribution to meet specific requirements for fire protection planning activities. While units of the actual data set are in *houses per sq. km.*, the data is presented as the *number of houses per acre* to aid with interpretation and use by fire planners in the South.

In the past, conventional wildland urban interface data sets, such as USFS SILVIS, have been used to reflect these concerns. However, USFS SILVIS and other existing data sources do not provide the level of detail for defining population living in the wildland as needed by Southern state WUI specialists and local fire protection agencies.


The new SWRA WUI 2012 dataset is derived using advanced modeling techniques based on the SWRA Where People Live (housing density) dataset and 2012 LandScan population count data available from the Department of Homeland Security, HSIP Freedom Data Set. WUI is simply a subset of the Where People Live dataset. The primary difference between the WPL and WUI is that populated areas surrounded by sufficient non-burnable areas (i.e. interior urban areas) are removed from the Where People Live data set, as these areas are not expected to be directly impacted by a wildfire. Simply put, the SWRA WUI is the SWRA WPL data with the urban core areas removed.

Data is modeled at a 30-meter cell resolution, which is consistent with other SWRA layers. The following table shows the total population for each WUI area within the project area.


WUI – Population and Acres


	Housing Density	WUI Population	Percent of WUI Population	WUI Acres	Percent of WUI Acres
	LT 1hs/40ac	732	0.7 %	41,722	21.9 %
	1hs/40ac to 1hs/20ac	1,694	1.6 %	28,399	14.9 %
	1hs/20ac to 1hs/10ac	3,888	3.7 %	30,257	15.9 %
	1hs/10ac to 1hs/5ac	9,440	8.9 %	32,509	17.1 %
	1hs/5ac to 1hs/2ac	23,955	22.5 %	33,056	17.4 %
	1hs/2ac to 3hs/1ac	61,763	58.0 %	24,091	12.7 %
	GT 3hs/1ac	5,021	4.7 %	361	0.2 %
	Total	106,493	100.0 %	190,395	100.0 %

Carroll County
Wildland Urban Interface

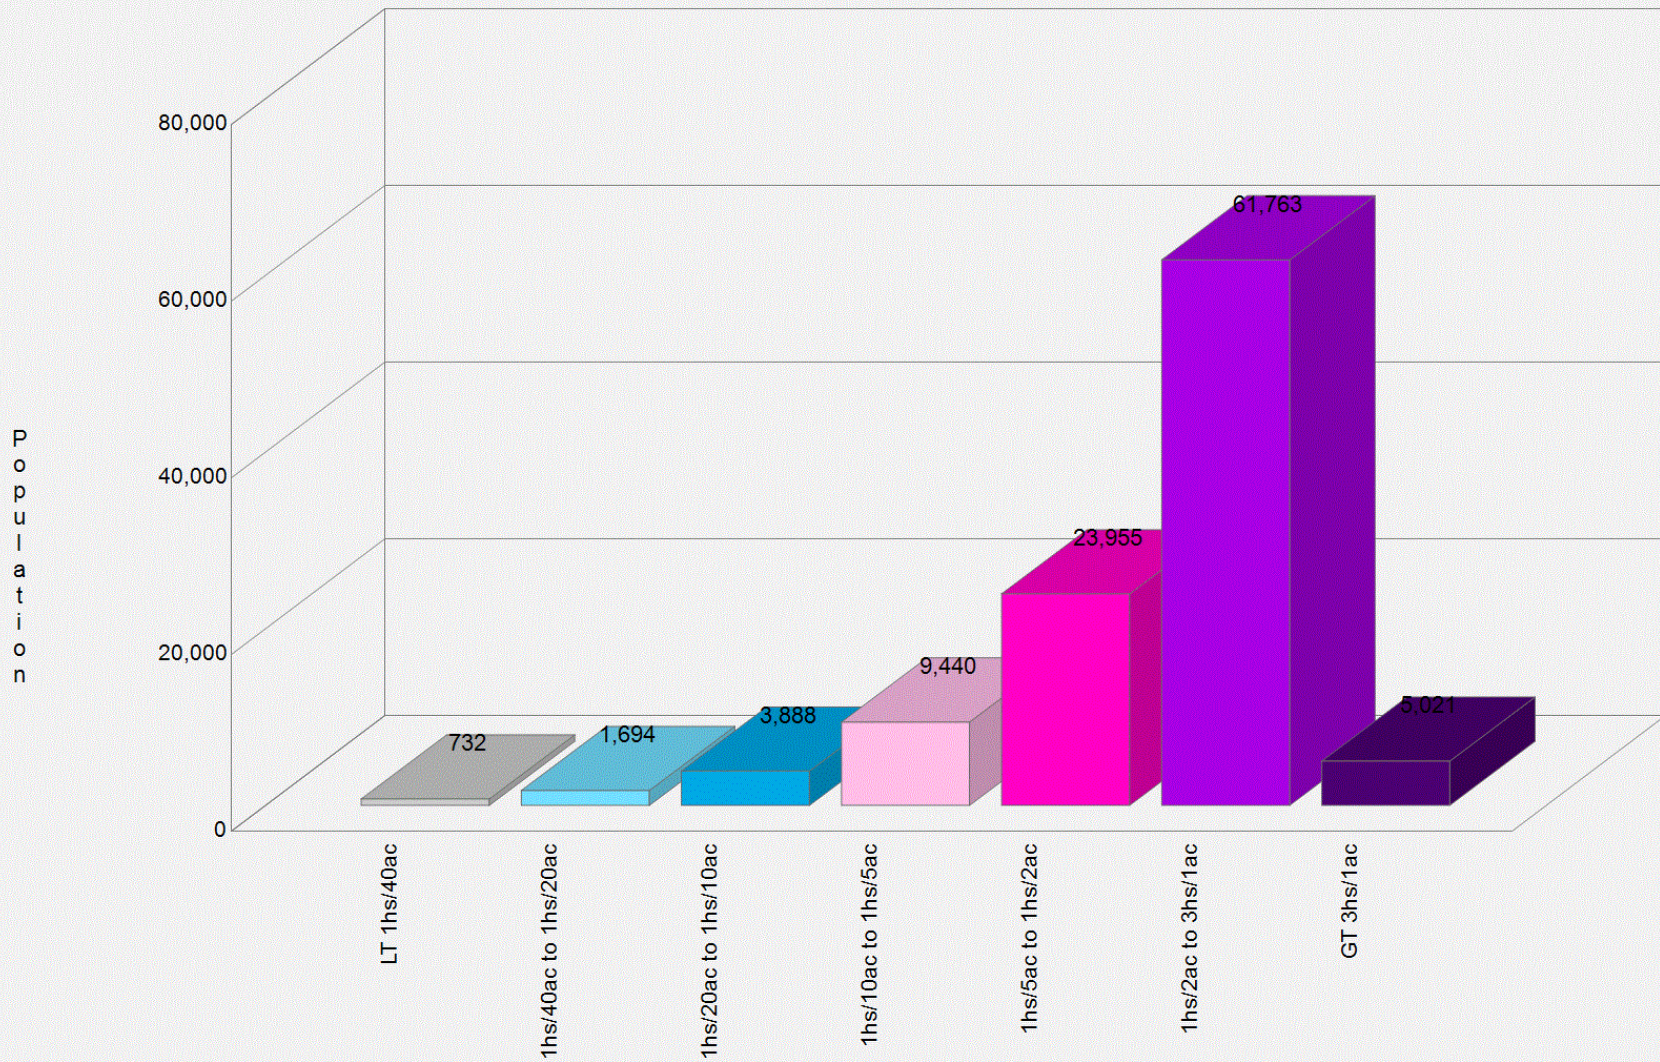

Carroll County
Wildland Urban Interface

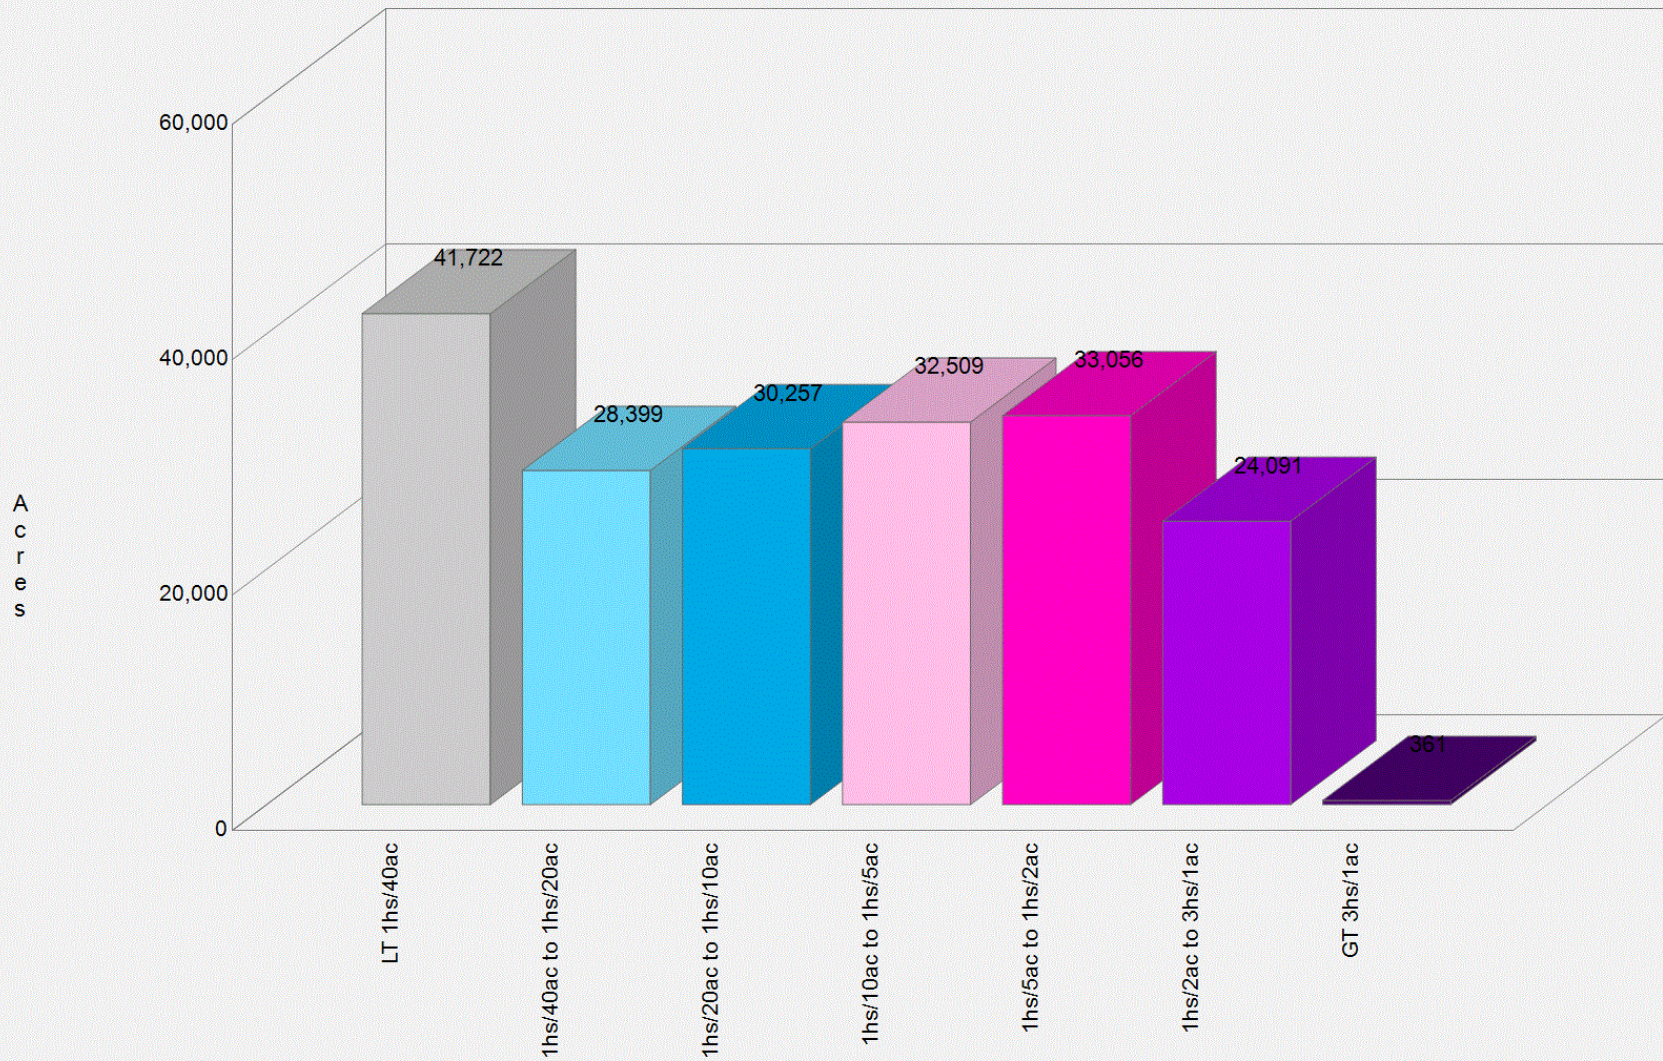

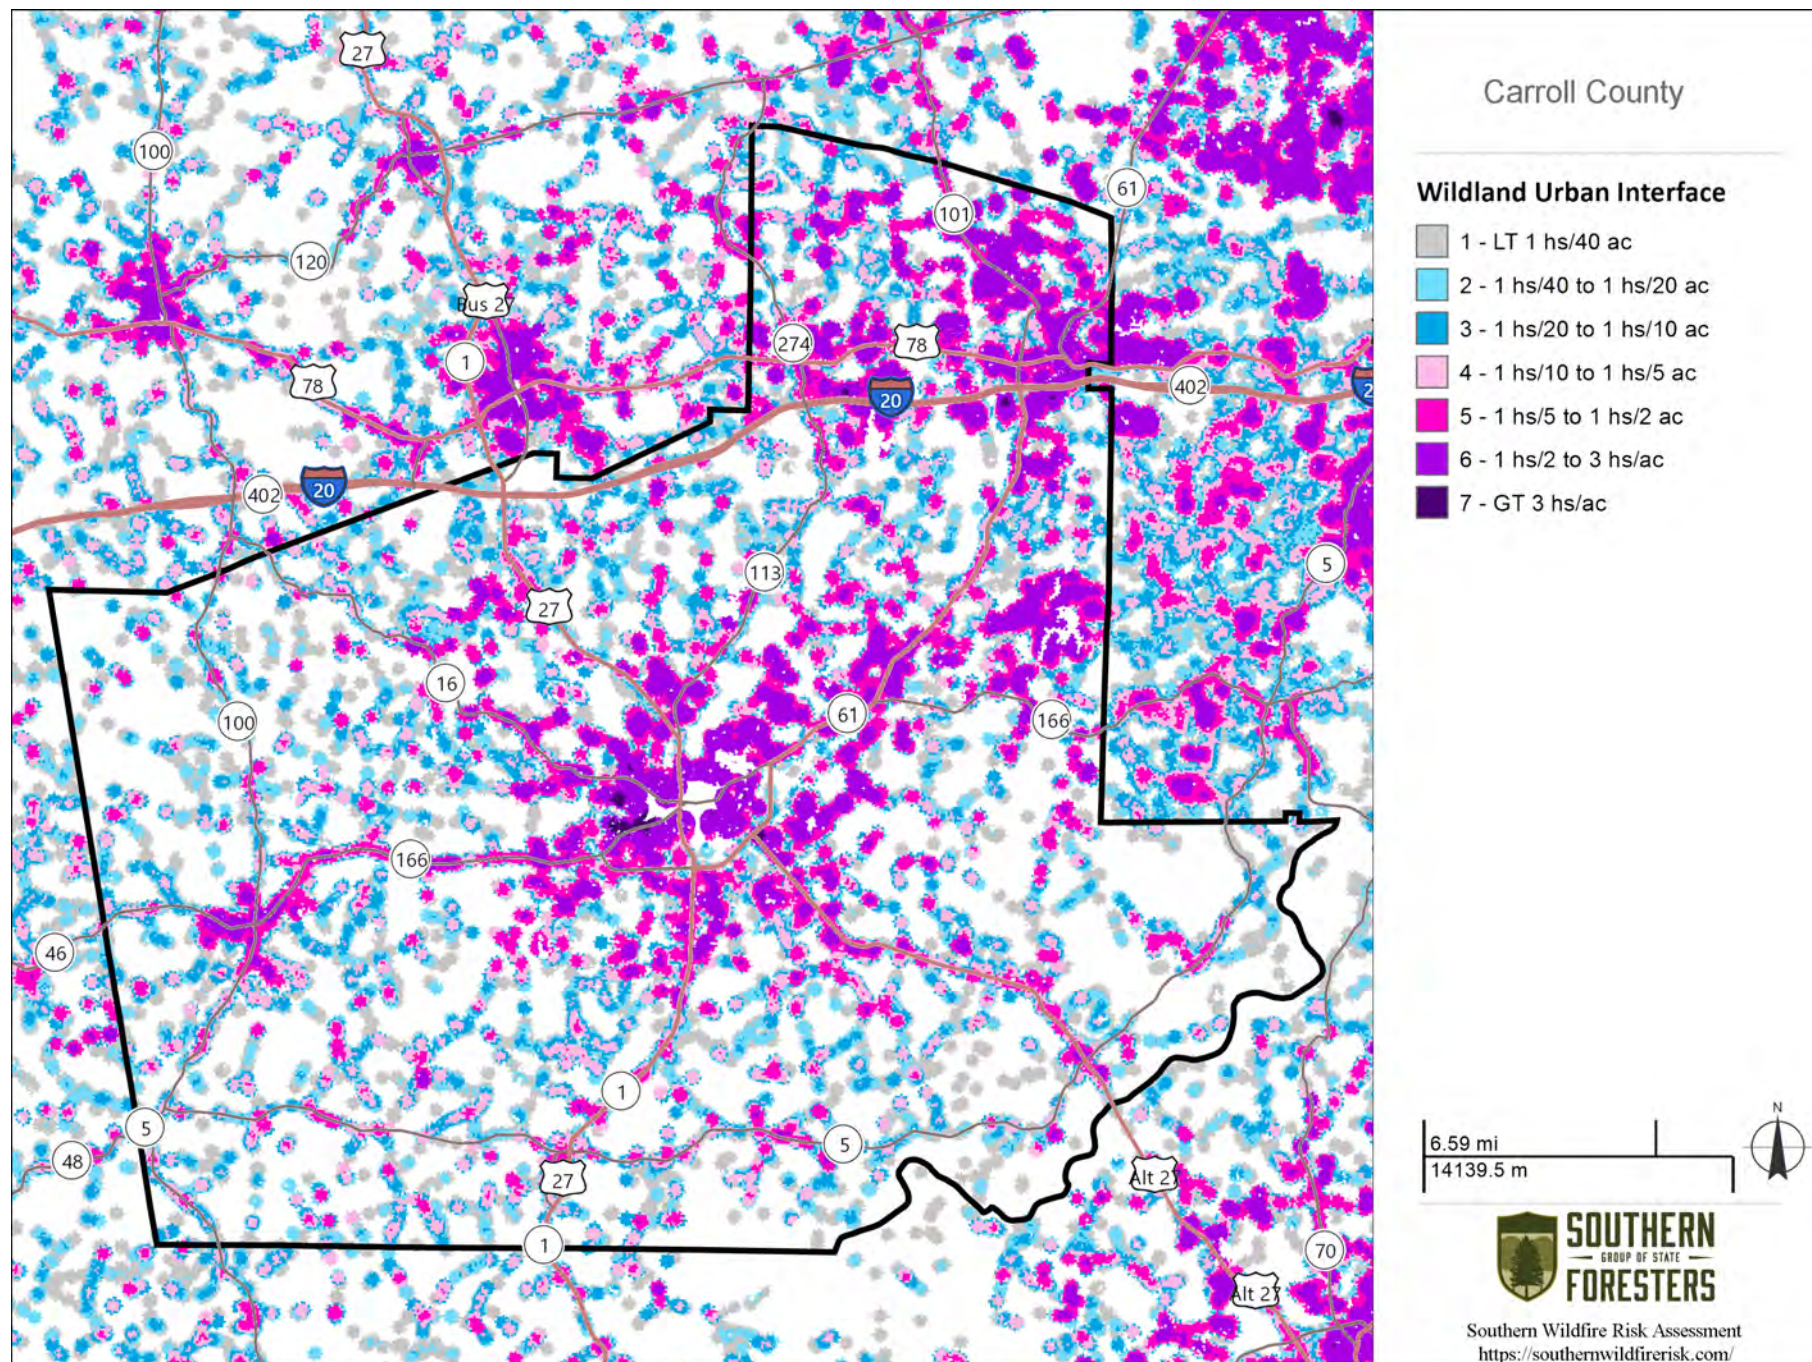

WUI Risk Index

Description

The Wildland Urban Interface (WUI) Risk Index layer is a rating of the potential impact of a wildfire on people and their homes. The key input, WUI, reflects housing density (houses per acre) consistent with Federal Register National standards. The location of people living in the Wildland Urban Interface and rural areas is key information for defining potential wildfire impacts to people and homes.


The WUI Risk Rating is derived using a Response Function modeling approach. Response functions are a method of assigning a net change in the value to a *resource* or *asset* based on susceptibility to fire at different intensity levels, such as flame length. The range of values is from -1 to -9, with -1 representing the least negative impact and -9 representing the most negative impact. For example, areas with high housing density and high flame lengths are rated -9 while areas with low housing density and low flame lengths are rated -1.


To calculate the WUI Risk Rating, the WUI housing density data was combined with Flame Length data and response functions were defined to represent potential impacts. The response functions were defined by a team of experts based on values defined by the SWRA Update Project technical team. By combining flame length with the WUI housing density data, you can determine where the greatest potential impact to homes and people is likely to occur.

Fire intensity data is modeled to incorporate penetration into urban fringe areas so that outputs better reflect real world conditions for fire spread and impact in fringe urban interface areas. With this enhancement, houses in urban areas adjacent to wildland fuels are incorporated into the WUI risk modeling. All areas in the South have the WUI Risk Index calculated consistently, which allows for comparison and ordination of areas across the entire region. Data is modeled at a 30-meter cell resolution, which is consistent with other SWRA layers.

	Class	Acres	Percent
	-9 Major Impacts	3	0.0 %
	-8	2,308	1.2 %
	-7	8,524	4.5 %
	-6	6,228	3.3 %
	-5 Moderate	68,745	36.5 %
	-4	31,082	16.5 %
	-3	15,758	8.4 %
	-2	42,936	22.8 %
	-1 Minor Impacts	12,836	6.8 %
	Total	188,420	100.0 %

Carroll County WUI Response Index

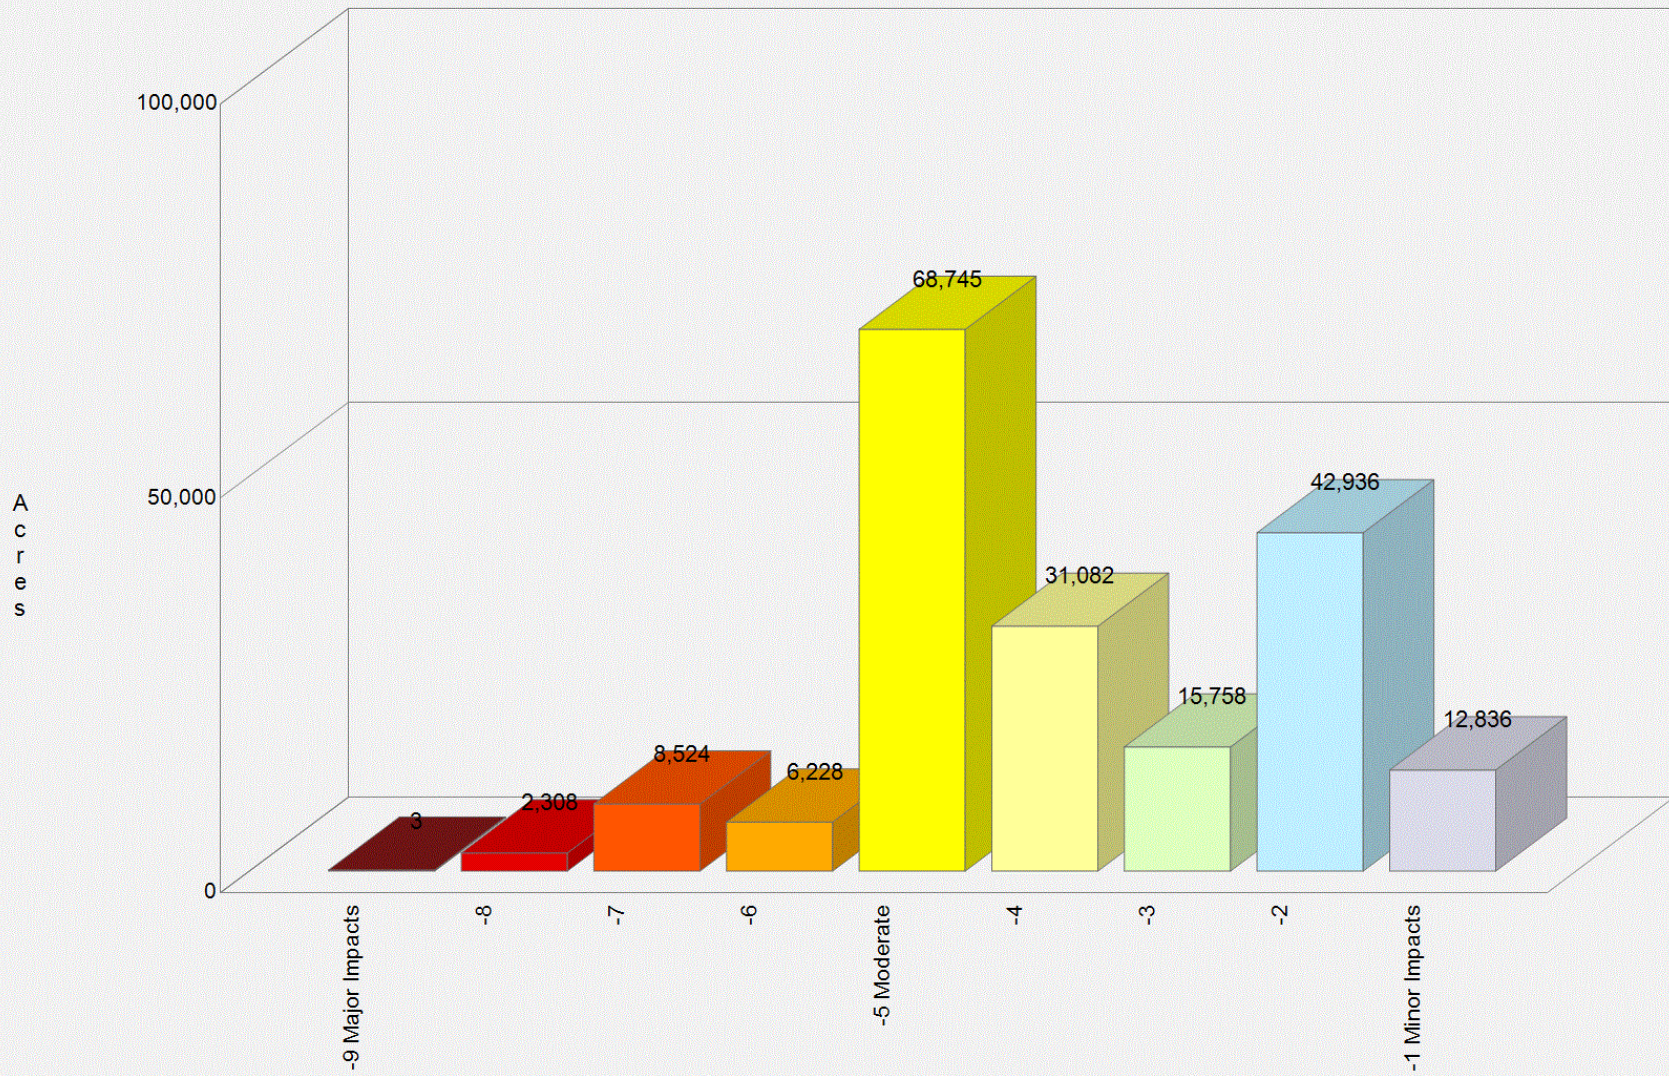

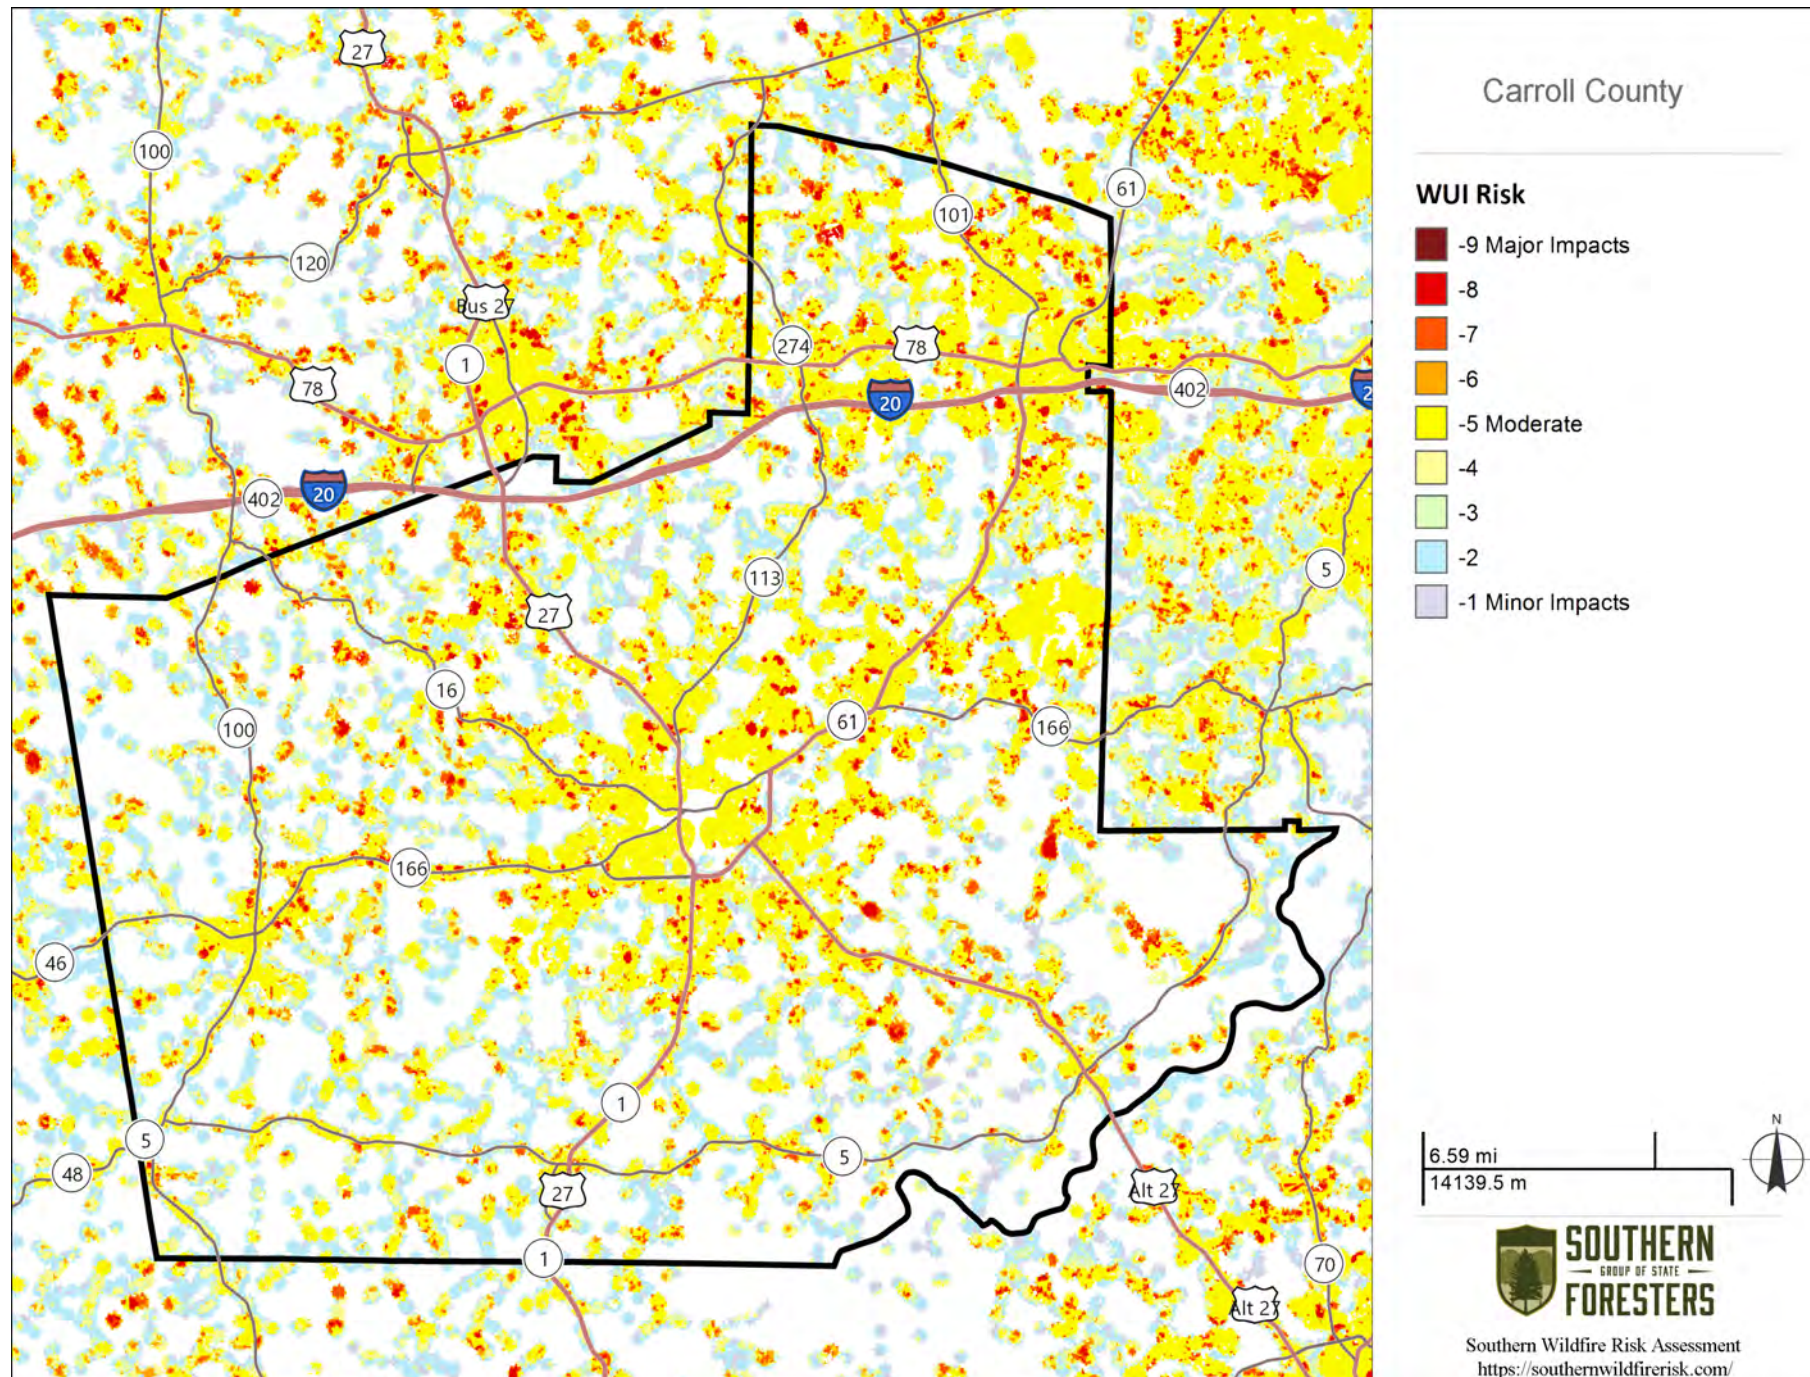

Community Protection Zones

Description

Community Protection Zones (CPZ) represent those areas considered highest priority for mitigation planning activities. CPZs are based on an analysis of the Where People Live housing density data and surrounding fire behavior potential. Rate of Spread data is used to determine the areas of concern around populated areas that are within a 2-hour fire spread distance. This is referred to as the Secondary CPZ.

General consensus among fire planners is that for fuel mitigation treatments to be effective in reducing wildfire hazard, they must be conducted within a close distance of a community. In the South, the WUI housing density has been used to reflect populated areas in place of community boundaries (Primary CPZ). This ensures that CPZs reflect where people are living in the wildland, not jurisdictional boundaries.


Secondary CPZs represent a variable width buffer around populated areas that are within a 2-hour fire spread distance. Accordingly, CPZs will extend farther in areas where rates of spread are greater and less in areas where minimal rate of spread potential exists. Secondary CPZ boundaries inherently incorporate fire behavior conditions.


Primary CPZs reflect areas with a predefined housing density, such as greater than 1 house per 20 acres. Secondary CPZs are the areas around Primary CPZs within a 2 hour fire spread distance.

All areas in the South have the CPZs calculated consistently, which allows for comparison and ordination of areas across the entire region. Data is modeled at a 30-meter cell resolution, which is consistent with other SWRA layers.

	Class	Acres	Percent
	Primary	120,011	53.5 %
	Secondary	104,202	46.5 %
	Total	224,213	100.0 %

Carroll County Community Protection Zones

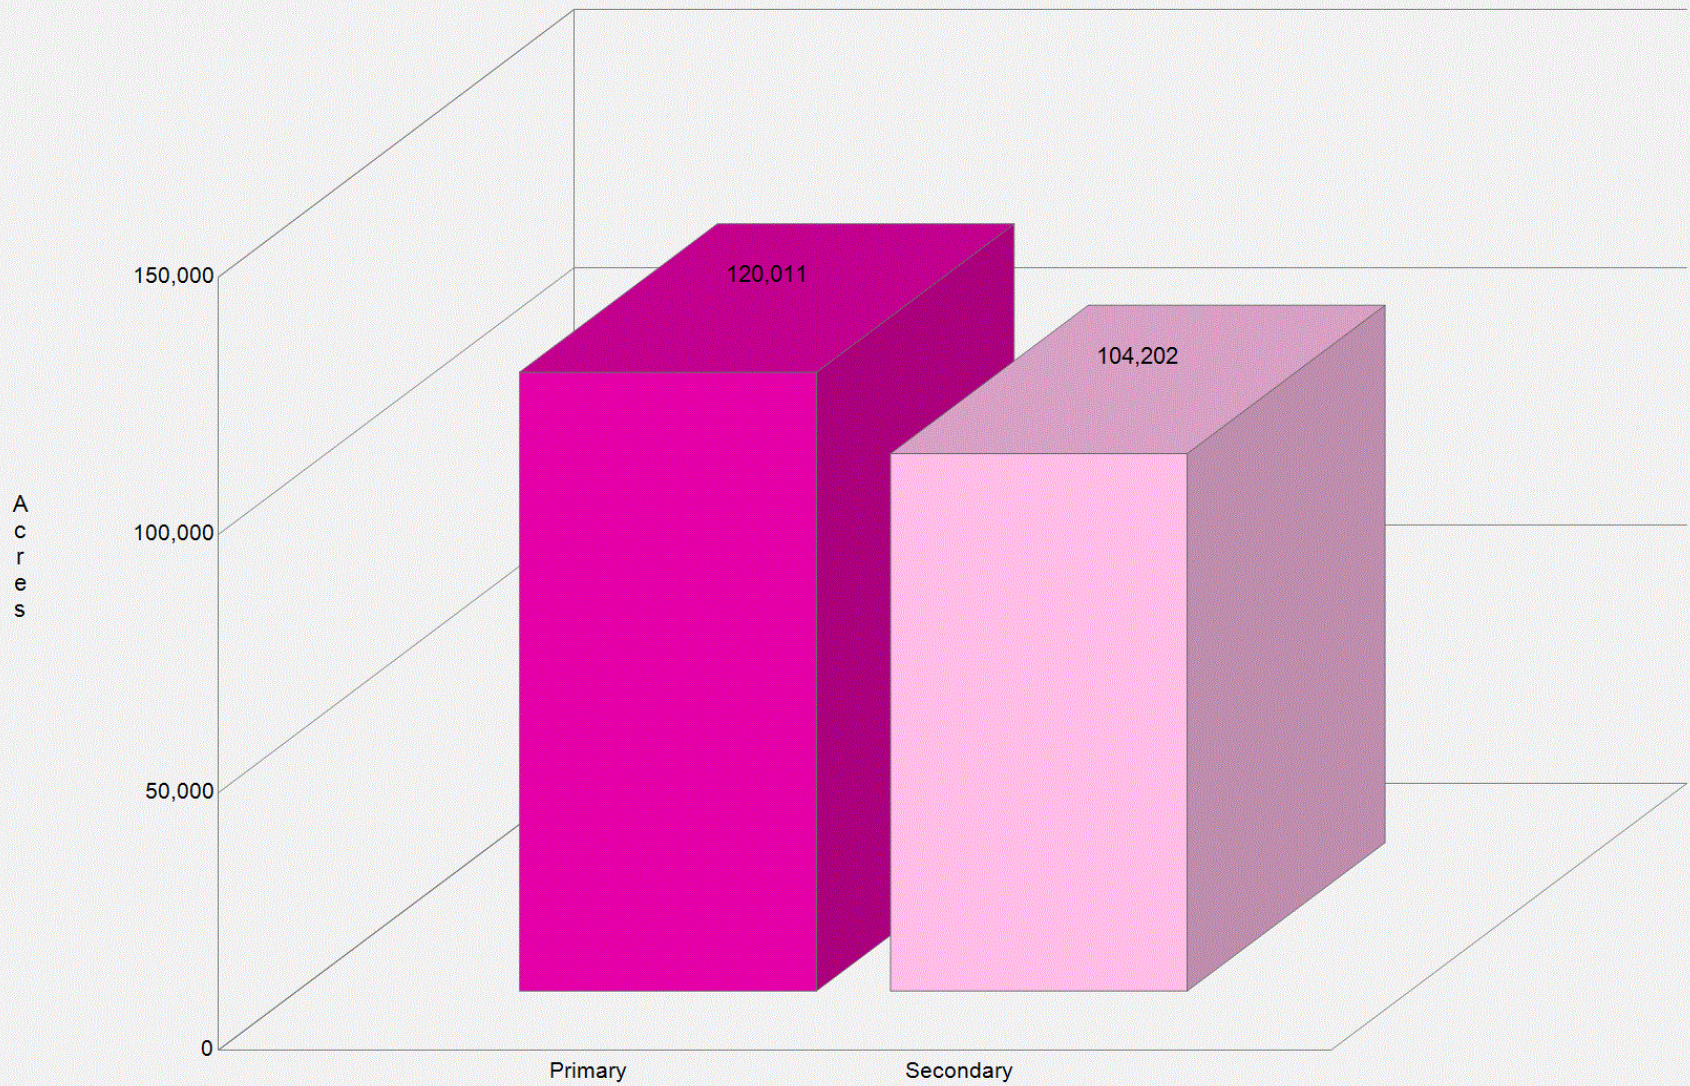

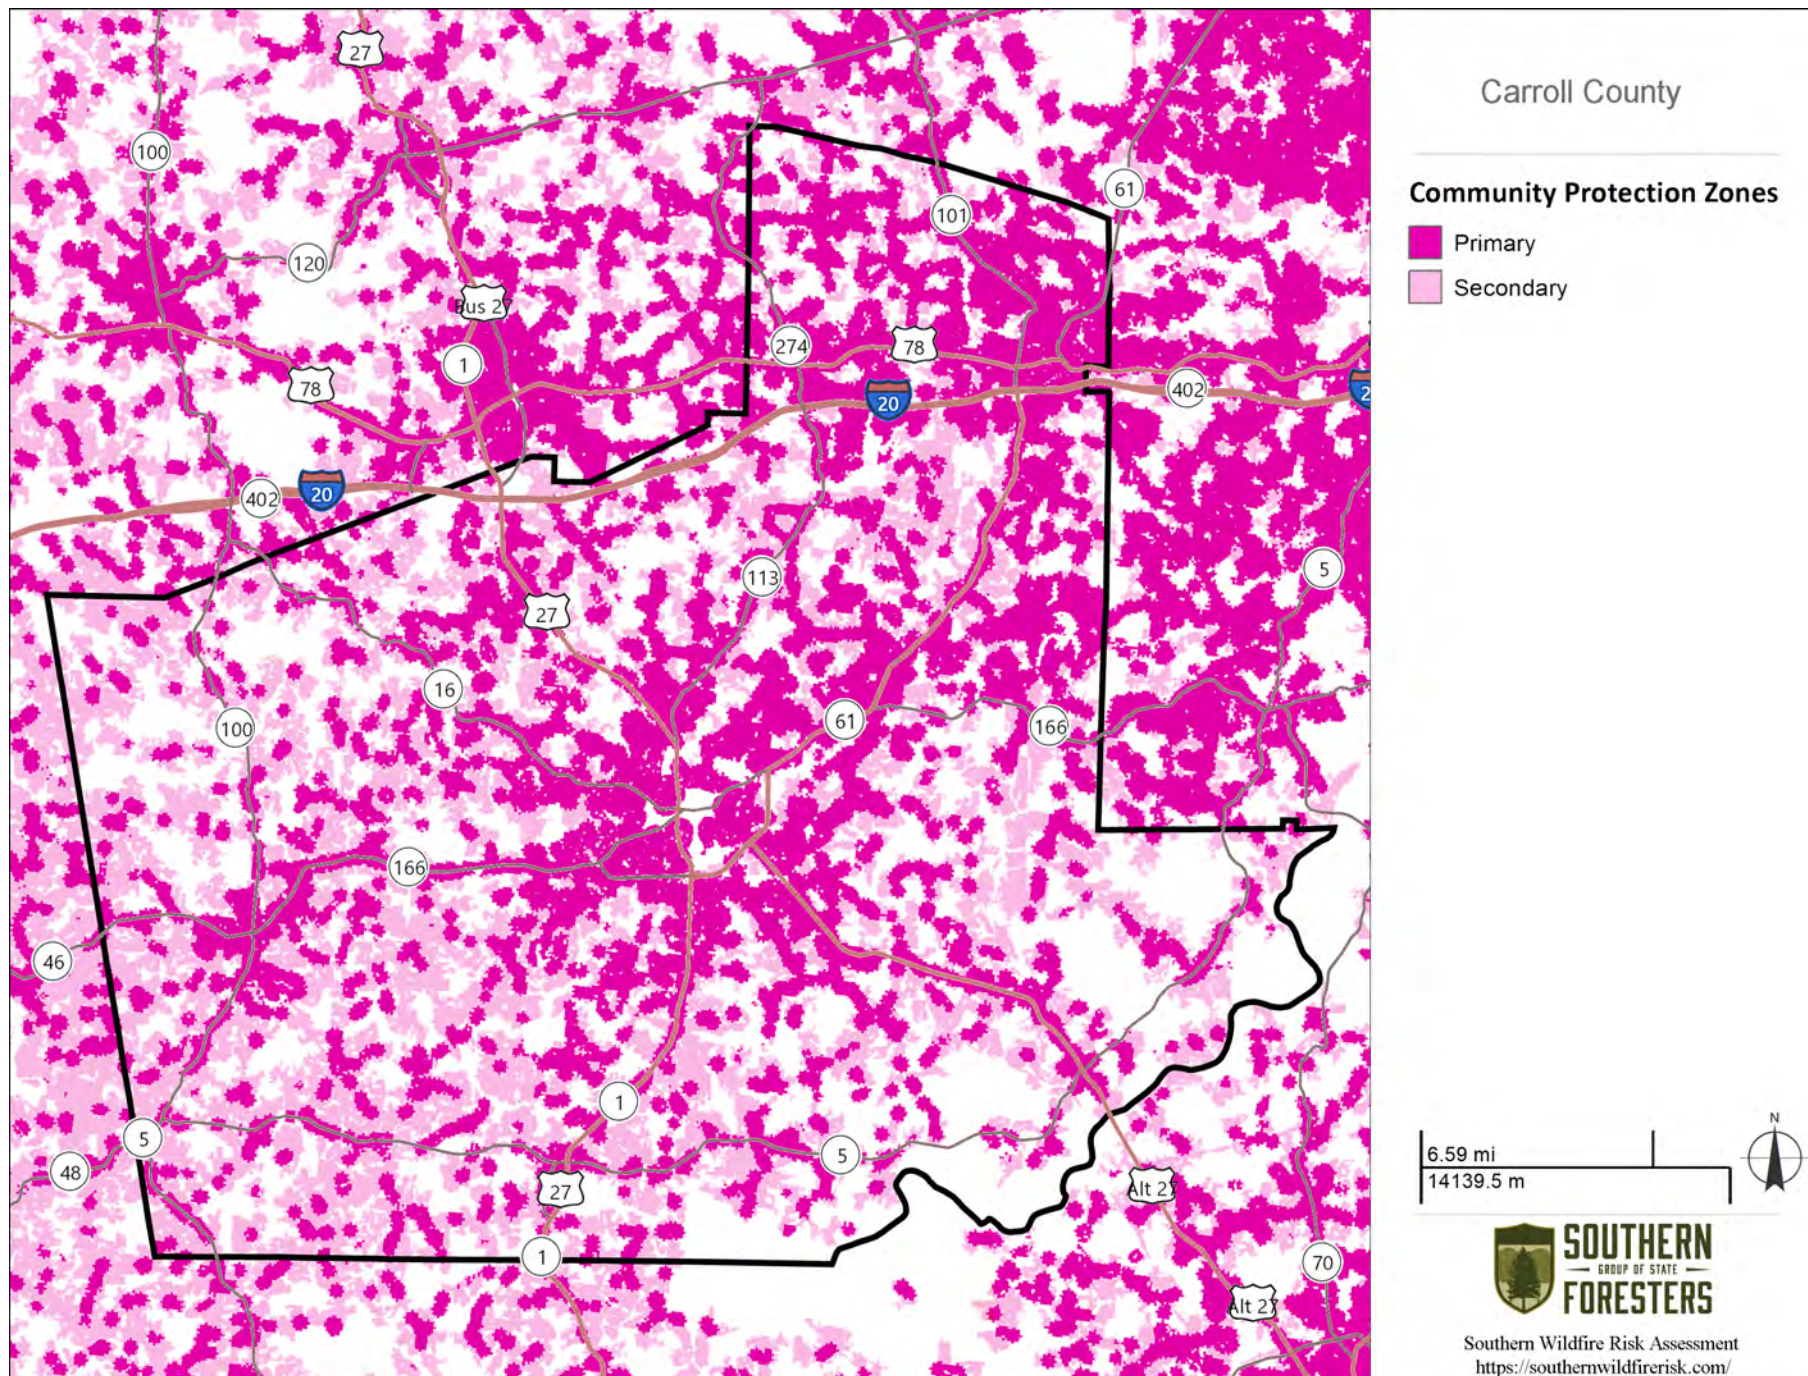

Burn Probability

Description

The Burn Probability (BP) layer depicts the probability of an area burning given current landscape conditions, percentile weather, historical ignition patterns and historical fire prevention and suppression efforts.

Describe in more detail, it is the tendency of any given pixel to burn, given the static landscape conditions depicted by the LANDFIRE Refresh 2008 dataset (as resampled by FPA), contemporary weather and ignition patterns, as well as contemporary fire management policies (entailing considerable fire prevention and suppression efforts).

The BP data does not, and is not intended to, depict fire-return intervals of any vintage, nor do they indicate likely fire footprints or routes of travel. Nothing about the expected shape or size of any actual fire incident can be interpreted from the burn probabilities. Instead, the BP data, in conjunction with the Fire Program Analysts FIL layers, are intended to support an actuarial approach to quantitative wildfire risk analysis (e.g., see Thompson et al. 2011).

Values in the Burn Probability (BP) data layer indicate, for each pixel, the number of times that cell was burned by an FSim-modeled fire, divided by the total number of annual weather scenarios simulated. Burn probability raster data was generated using the large fire simulator - FSim - developed for use in the Fire Program Analysis (FPA) project. FSim uses historical weather data and current landcover data for discrete geographical areas (Fire Planning Units - FPU) and simulates fires in these FPU. Using these simulated fires, an overall burn probability and marginal burn probabilities at four fire intensities (flame lengths) are returned by FSim for each 270m pixel in the FPU.

The fire growth simulations, when run repeatedly with different ignition locations and weather streams, generate burn probabilities and fire behavior distributions at each landscape location (i.e., cell or pixel). Results are objectively evaluated through comparison with historical fire patterns and statistics, including the mean annual burn probability and fire size distribution, for each FPU. This evaluation is part of the FSim calibration process for each FPU, whereby simulation inputs are adjusted until the slopes of the historical and modeled fire size distributions are similar and the modeled average burn probability falls within an acceptable range of the historical reference value (i.e., the 95% confidence interval for the mean).


Please refer to the metadata available for this dataset for a detailed description of the data processing methods, assumptions and references that pertain to the development of this data. This information is available from the USFS Missoula Fire Sciences Laboratory.


Please refer to the web site link in the report References to obtain more detailed descriptions of FPA and the related data products such as Burn Probability.

Burn Probability replaces the Wildland Fire Susceptibility Index (WFSI) layer developed in the original SWRA project completed in 2005.

	Class	Acres	Percent
	1	9,385	3.3 %
	2	38,100	13.2 %
	3	56,149	19.5 %
	4	53,736	18.6 %
	5	105,021	36.4 %
	6	23,923	8.3 %
	7	1,657	0.6 %
	8	270	0.1 %
	9	0	0.0 %
	10	0	0.0 %
	Total	288,241	100.0 %

Carroll County Burn Probability

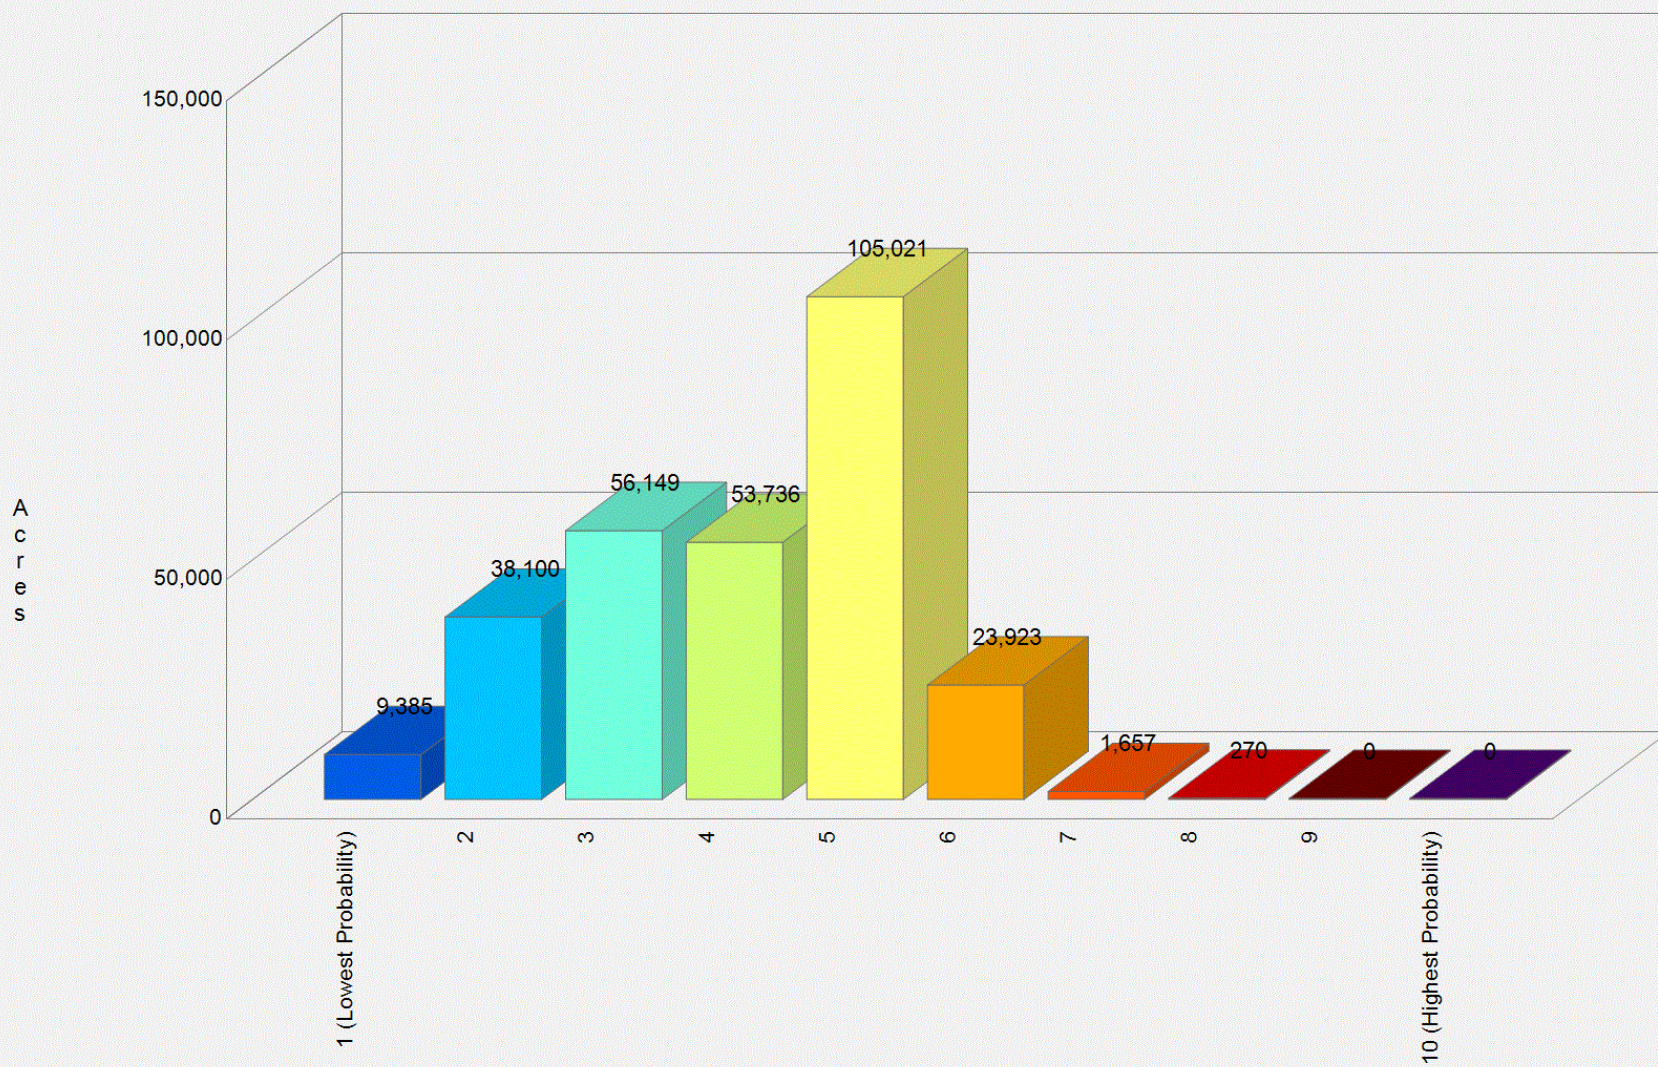

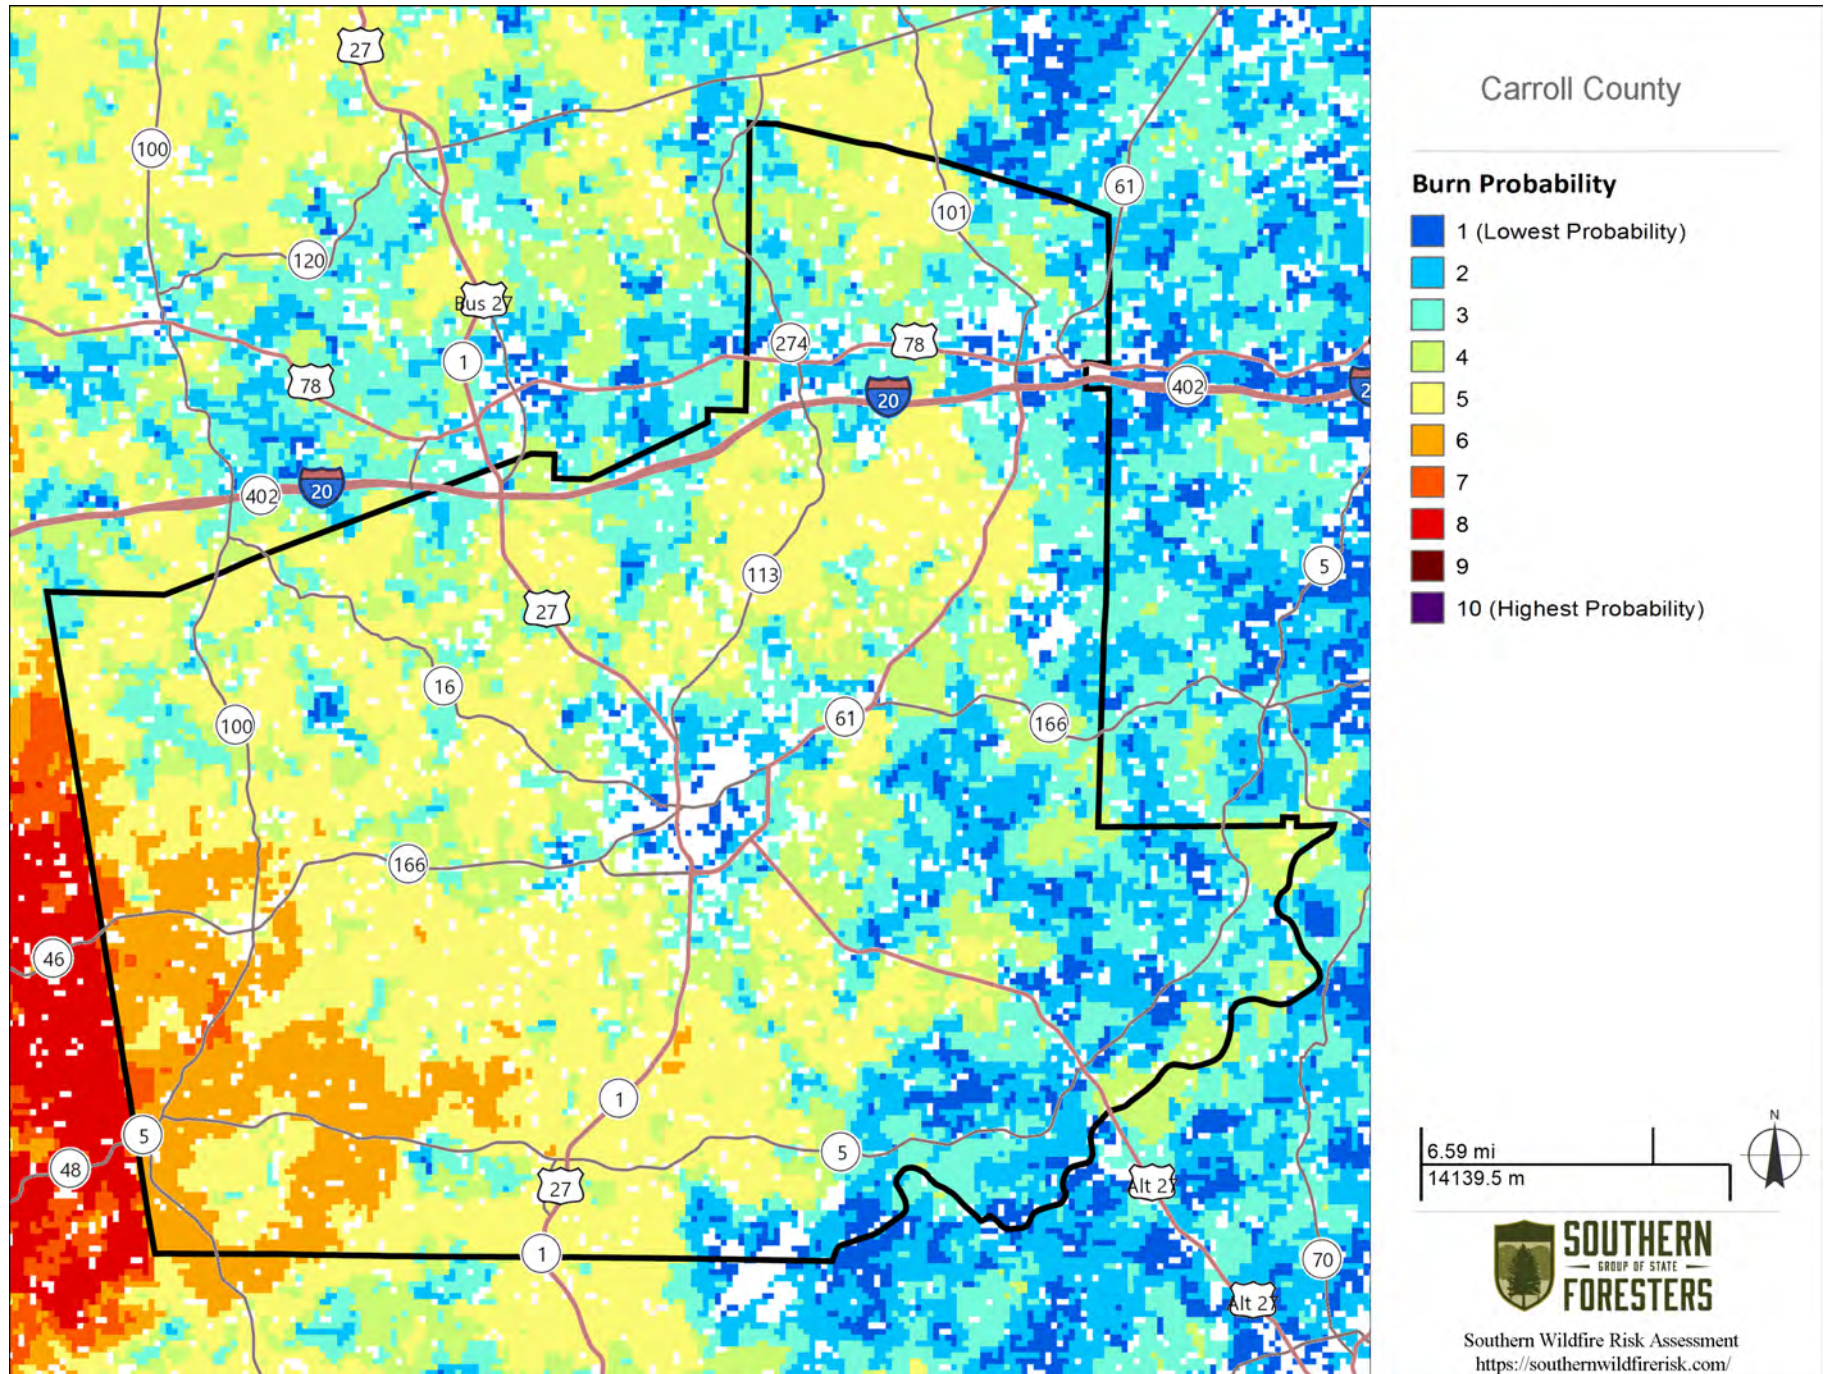

Fire Behavior

Description

Fire behavior is the manner in which a fire reacts to the following environmental influences:

1. **Fuels**
2. **Weather**
3. **Topography**



Fire behavior characteristics are attributes of wildland fire that pertain to its spread, intensity, and growth. Fire behavior characteristics utilized in the Southern Wildfire Risk Assessment (SWRA) include fire type, rate of spread, flame length and fire intensity scale. These metrics are used to determine the potential fire behavior under different weather scenarios. Areas that exhibit moderate to high fire behavior potential can be identified for mitigation treatments, especially if these areas are in close proximity to homes, business, or other assets.

Fuels

The SWRA includes composition and characteristics for both surface fuels and canopy fuels. Significant increases in fire behavior will be captured if the fire has the potential to transition from a surface fire to a canopy fire.

Fuel datasets required to compute both surface and canopy fire potential include:

- **Surface Fuels**, generally referred to as fire behavior fuel models, provide the input parameters needed to compute surface fire behavior.
- **Canopy Cover** is the horizontal percentage of the ground surface that is covered by tree crowns. It is used to compute wind reduction factors and shading.
- **Canopy Ceiling Height/Stand Height** is the height above the ground of the highest canopy layer where the density of the crown mass within the layer is high enough to support vertical movement of a fire. A good estimate of canopy ceiling height would be the average height of the dominant and co-dominant trees in a stand. It is used for computing wind reduction to midflame height and spotting distances from torching trees (Fire Program Solutions, L.L.C, 2005).
- **Canopy Base Height** is the lowest height above the ground above which there is sufficient canopy fuel to propagate fire vertically (Scott & Reinhardt, 2001). Canopy base height is a property of a plot, stand, or group of trees, not of an individual tree. For fire modeling, canopy base height is an effective value that incorporates ladder fuel, such as tall shrubs and small trees. Canopy base height is used to determine if a surface fire will transition to a canopy fire.
- **Canopy Bulk Density** is the mass of available canopy fuel per unit canopy volume (Scott & Reinhardt, 2001). Canopy bulk density is a bulk property of a stand, plot, or group of trees, not of an individual tree. Canopy bulk density is used to predict whether an active crown fire is possible.

Weather

Environmental weather parameters needed to compute fire behavior characteristics include 1-hour, 10-hour, and 100-hour timelag fuel moistures, herbaceous fuel moisture, woody fuel moisture, and the 20-foot 10 minute average wind speed. To collect this information, weather influence zones were established across the region. A weather influence zone is an area where for analysis purposes the weather on any given day is considered uniform. Within each weather influence zone, historical daily weather is gathered to compile a weather dataset from which four percentile weather categories are created. The percentile weather categories are intended to represent low, moderate, high, and extreme fire weather days. Fire behavior outputs are computed for each percentile weather category to determine fire potential under different weather scenarios.

The four percentile weather categories include:

- Low Weather Percentile (0 – 15%)
- Moderate Weather Percentile (16 – 90%)
- High Weather Percentile (91 – 97%)
- Extreme Weather Percentile (98 – 100%)

Topography

Topography datasets required to compute fire behavior characteristics are elevation, slope and aspect.

FIRE BEHAVIOR CHARACTERISTICS

Fire behavior characteristics provided in this report include:

- **Characteristic Rate of Spread**
- **Characteristic Flame Length**
- **Characteristic Fire Intensity Scale**
- **Fire Type - Extreme**

Characteristic Rate of Spread

Description


Characteristic Rate of Spread is the typical or representative rate of spread of a potential fire based on a weighted average of four percentile weather categories. Rate of spread is the speed with which a fire moves in a horizontal direction across the landscape, usually expressed in chains per hour (ch/hr) or feet per minute (ft/min). For purposes of the Southern Wildfire Risk Assessment, this measurement represents the maximum rate of spread of the fire front. Rate of Spread is the metric used to derive the Community Protection Zones.


Rate of spread is a fire behavior output, which is influenced by three environmental factors - fuels, weather, and topography. Weather is by far the most dynamic variable as it changes frequently. To account for this variability, four percentile weather categories were created from historical weather observations to represent low, moderate, high, and extreme weather days for each weather influence zone in the South. A weather influence zone is an area where, for analysis purposes, the weather on any given day is considered uniform.

For all Southern states, except Florida and Texas, this dataset was derived from updated fuels and canopy data as part of the 2010 SWRA Update Project recently completed in May 2014. For Texas, the 2010 Texas risk update data is portrayed. For Florida, the 2010 Florida risk assessment update data is shown.

Rate of Spread		Acres	Percent
	Non-Burnable	37,637	11.7 %
	0 - 5 (ch/hr)	96,576	29.9 %
	5 - 10 (ch/hr)	39,350	12.2 %
	10 - 15 (ch/hr)	28,808	8.9 %
	15 - 20 (ch/hr)	28,982	9.0 %
	20 - 30 (ch/hr)	68,735	21.3 %
	30 - 50 (ch/hr)	21,242	6.6 %
	50 - 150 (ch/hr)	1,175	0.4 %
	150 + (ch/hr)	0	0.0 %
Total		322,505	100.0 %


Carroll County Characteristic Rate of Spread

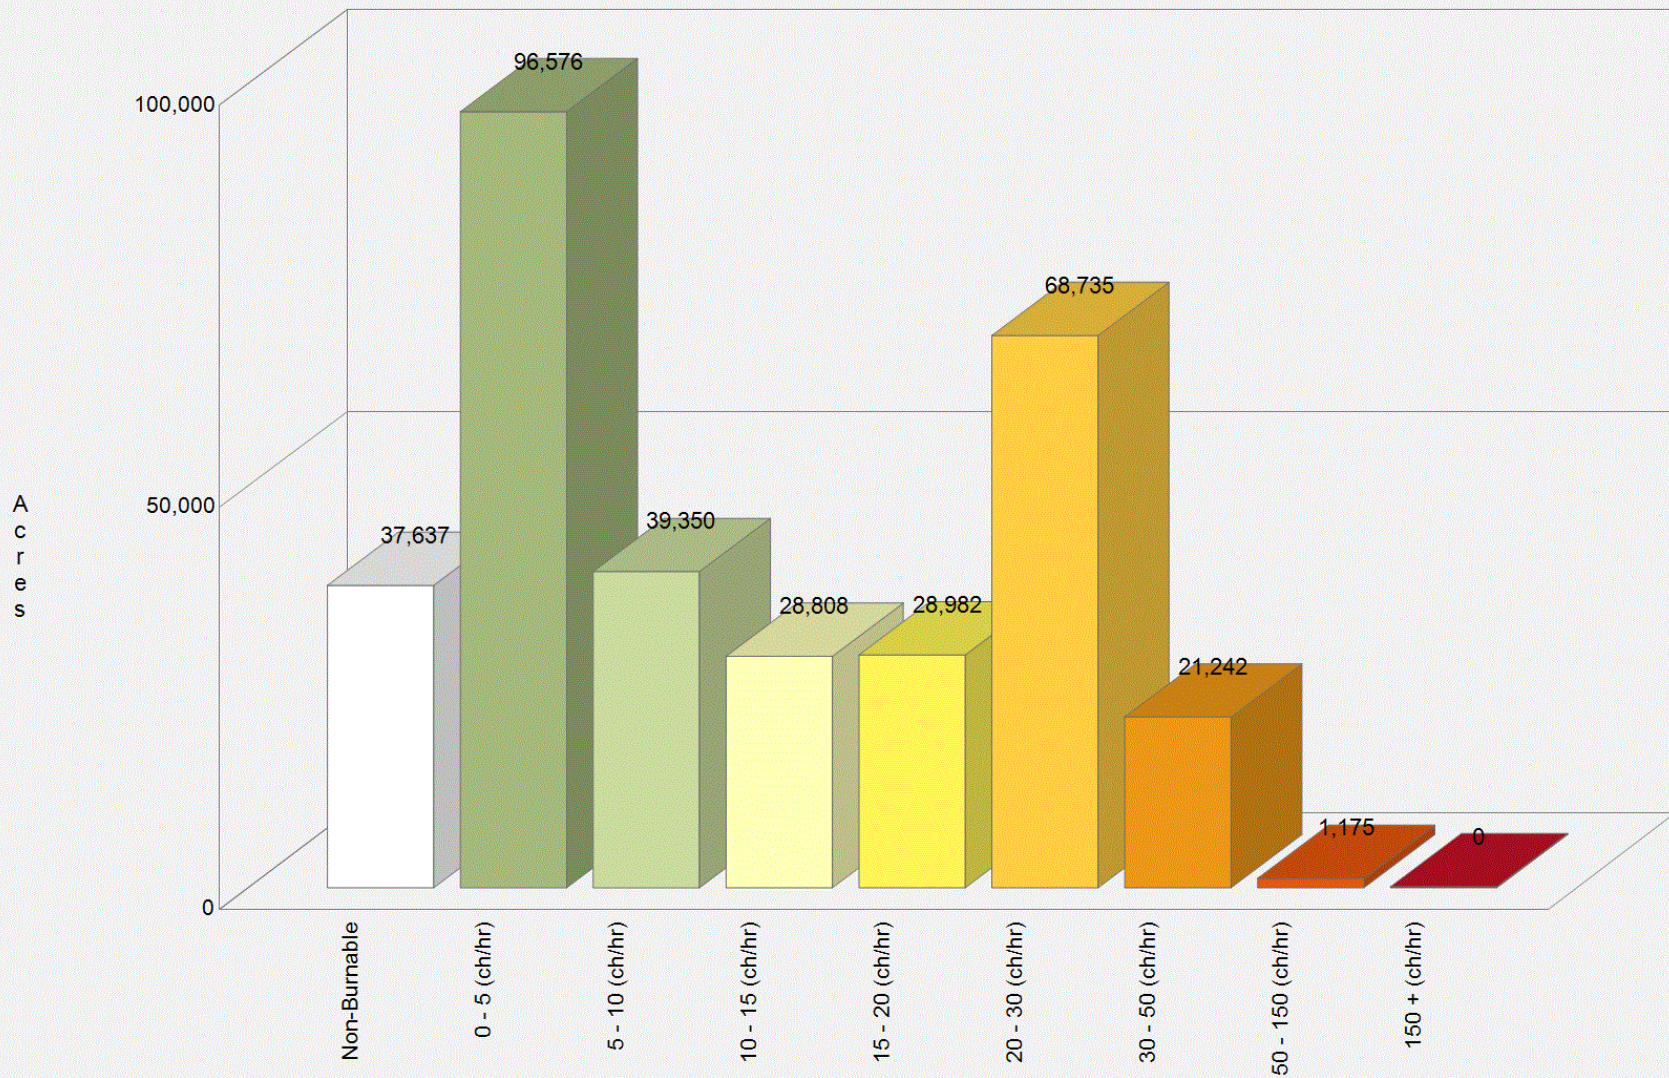

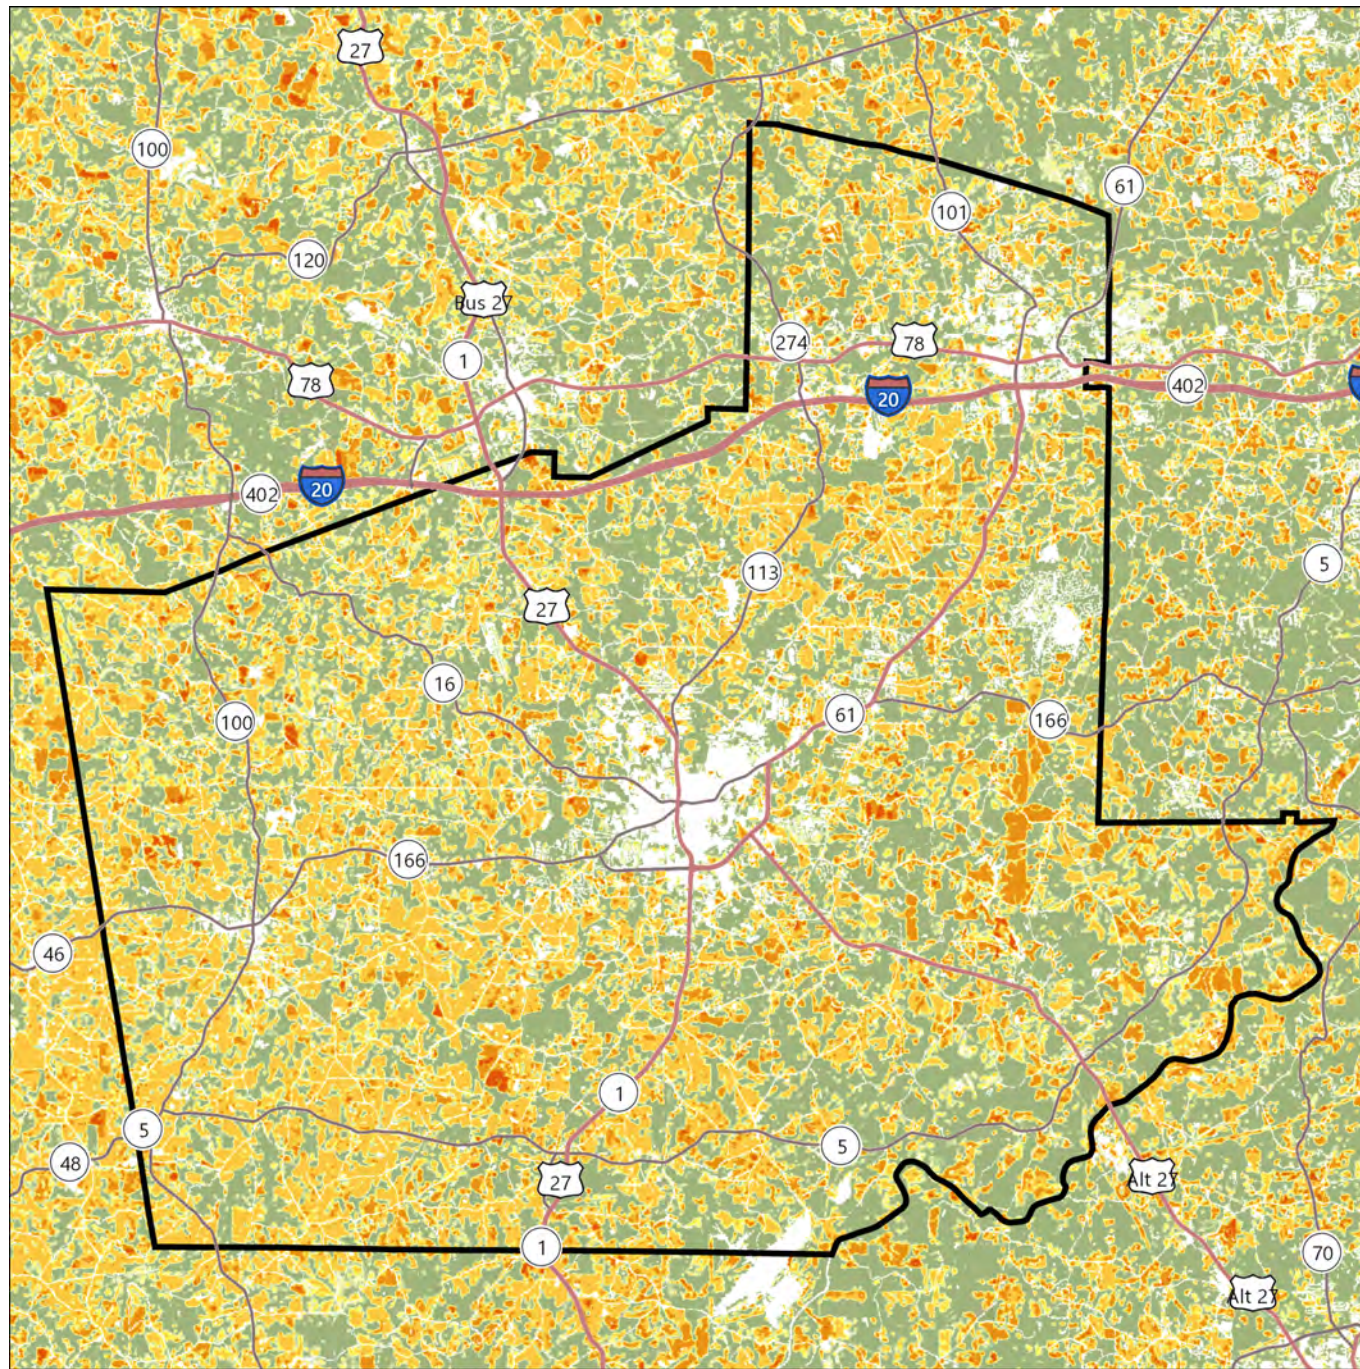

Carroll County

Rate Of Spread

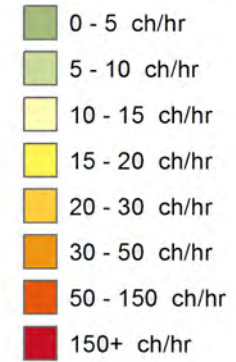

6.59 mi
14139.5 m



Southern Wildfire Risk Assessment
<https://southernwildfirerisk.com/>

Characteristic Flame Length

Description


Characteristic Flame Length is the typical or representative flame length of a potential fire based on a weighted average of four percentile weather categories. Flame Length is defined as the distance between the flame tip and the midpoint of the flame depth at the base of the flame, which is generally the ground surface. It is an indicator of fire intensity and is often used to estimate how much heat the fire is generating. Flame length is typically measured in feet (ft). Flame length is the measure of fire intensity used to generate the response index outputs for the SWRA.


Flame length is a fire behavior output, which is influenced by three environmental factors - fuels, weather, and topography. Weather is by far the most dynamic variable as it changes frequently. To account for this variability, four percentile weather categories were created from historical weather observations to represent low, moderate, high, and extreme weather days for each weather influence zone in the South. A weather influence zone is an area where, for analysis purposes, the weather on any given day is considered uniform.

For all Southern states, except Florida and Texas, this dataset was derived from updated fuels and canopy data as part of the 2010 SWRA Update Project recently completed in May 2014. For Texas, the 2010 Texas risk update data is portrayed. For Florida, the 2010 Florida risk assessment update data is shown.

Flame Length		Acres	Percent
	Non-Burnable	37,637	11.7 %
	0 - 2 ft	112,261	34.8 %
	2 - 4 ft	113,987	35.3 %
	4 - 8 ft	32,428	10.1 %
	8 - 12 ft	9,962	3.1 %
	12 - 20 ft	8,335	2.6 %
	20 - 30 ft	7,063	2.2 %
	30 + ft	832	0.3 %
Total		322,505	100.0 %

Carroll County Characteristic Flame Length

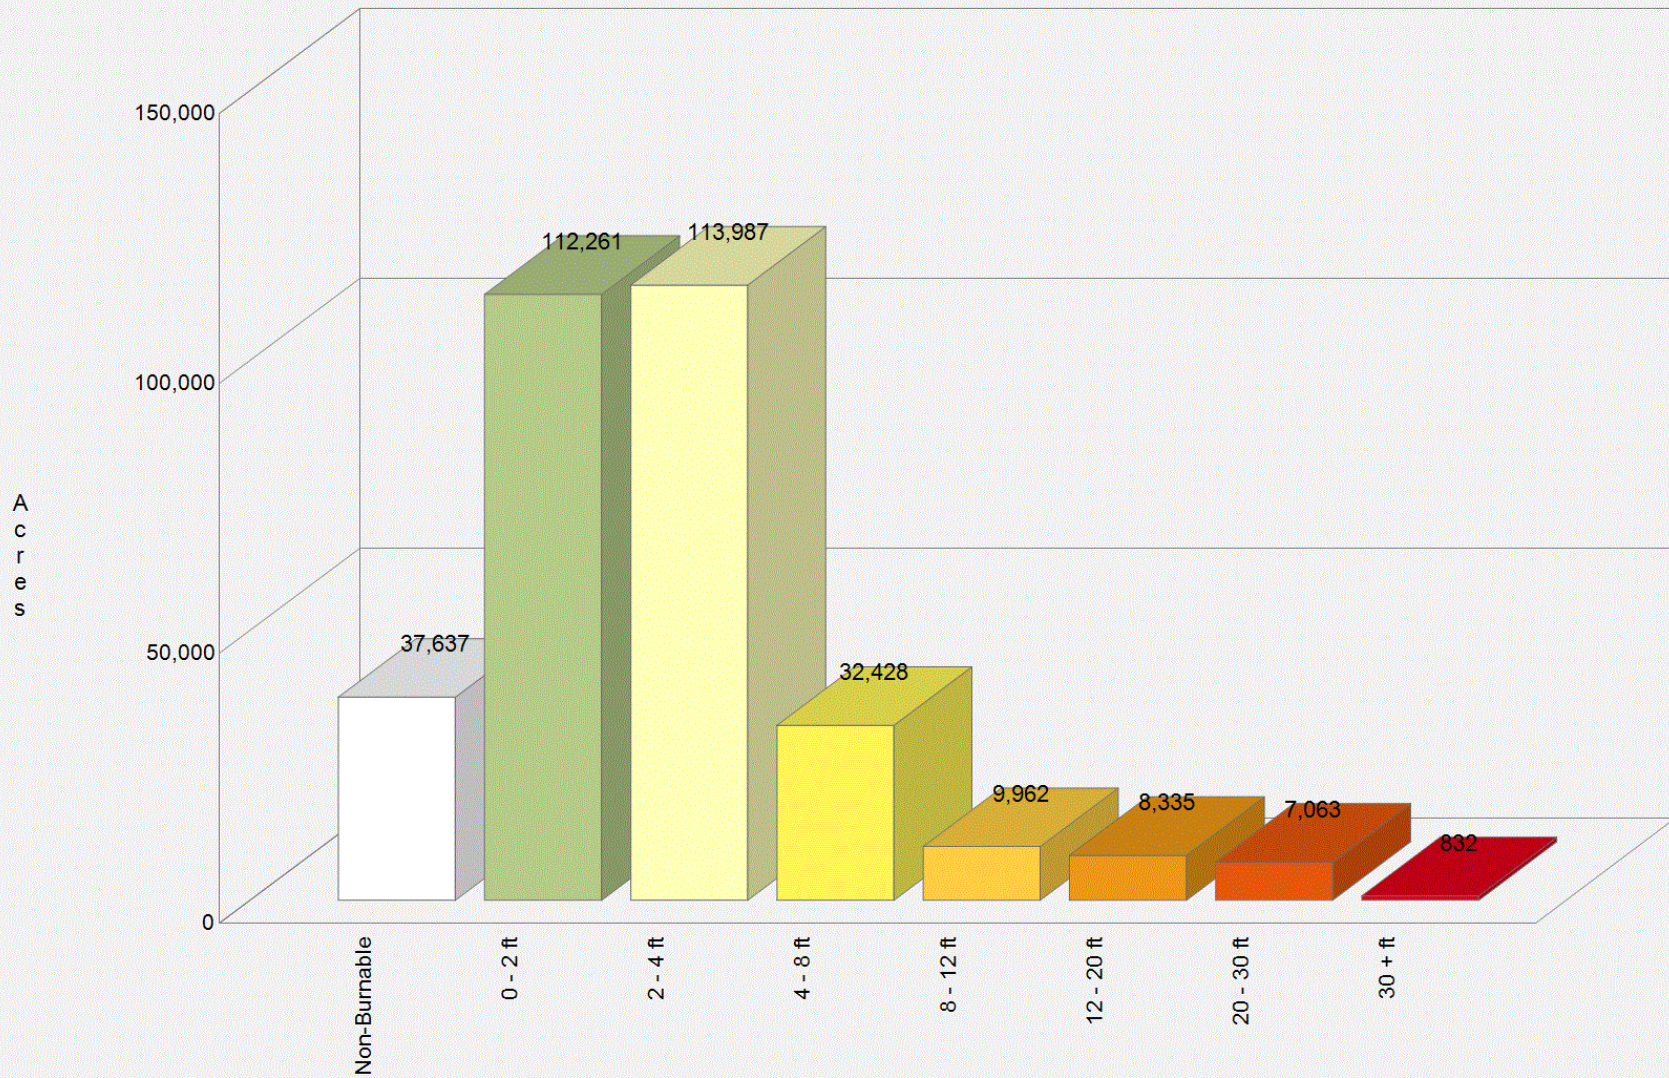

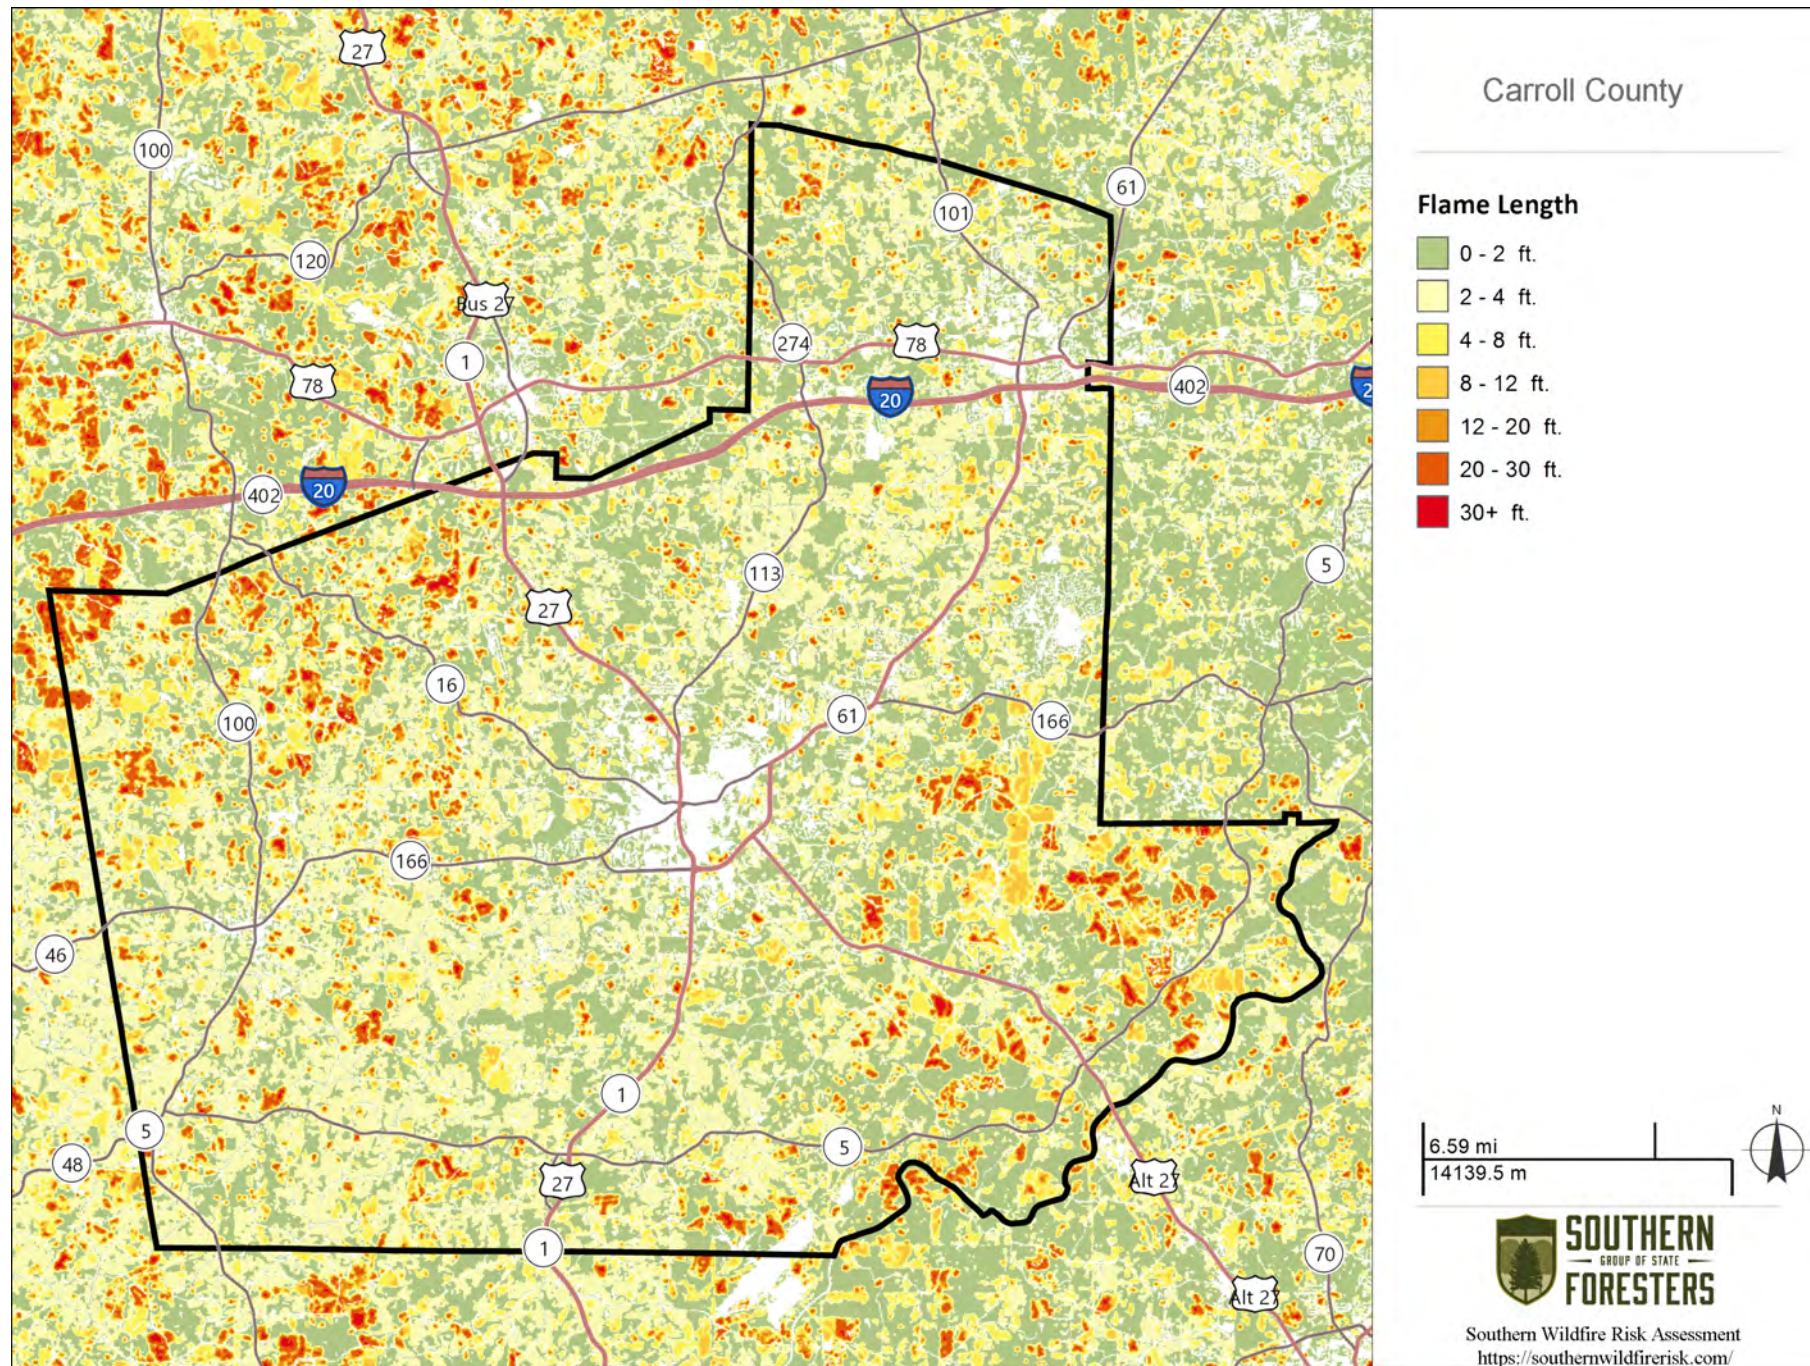

Characteristic Fire Intensity Scale

Description

Characteristic Fire Intensity Scale (FIS) specifically identifies areas where significant fuel hazards and associated dangerous fire behavior potential exist based on a weighted average of four percentile weather categories. Similar to the Richter scale for earthquakes, FIS provides a standard scale to measure potential wildfire intensity. FIS consist of 5 classes where the order of magnitude between classes is ten-fold. The minimum class, Class 1, represents very low wildfire intensities and the maximum class, Class 5, represents very high wildfire intensities. Refer to descriptions below.

- **Class 1, Very Low:**
Very small, discontinuous flames, usually less than 1 foot in length; very low rate of spread; no spotting. Fires are typically easy to suppress by firefighters with basic training and non-specialized equipment.
- **Class 2, Low:**
Small flames, usually less than two feet long; small amount of very short range spotting possible. Fires are easy to suppress by trained firefighters with protective equipment and specialized tools.
- **Class 3, Moderate:**
Flames up to 8 feet in length; short-range spotting is possible. Trained firefighters will find these fires difficult to suppress without support from aircraft or engines, but dozer and plows are generally effective. Increasing potential for harm or damage to life and property.

- **Class 4, High:**
Large Flames, up to 30 feet in length; short-range spotting common; medium range spotting possible. Direct attack by trained firefighters, engines, and dozers is generally ineffective, indirect attack may be effective. Significant potential for harm or damage to life and property.
- **Class 5, Very High:**
Very large flames up to 150 feet in length; profuse short-range spotting, frequent long-range spotting; strong fire-induced winds. Indirect attack marginally effective at the head of the fire. Great potential for harm or damage to life and property.

For all Southern states, except Texas, this dataset was derived from updated fuels and canopy data as part of the 2010 SWRA Update Project recently completed in May 2014. For Texas, the 2010 Texas risk update data is portrayed.

To aid in viewing on the map, FIS is presented in 1/2 class increments. Please consult the SouthWRAP User Manual for a more detailed description of the FIS class descriptions.


Since all areas in the South have fire intensity scale calculated consistently, it allows for comparison and ordination of areas across the entire region.


Fire intensity scale is a fire behavior output, which is influenced by three environmental factors - fuels, weather, and topography. Weather is by far the most dynamic variable as it changes frequently. To account for this variability, four percentile weather categories were created from historical weather observations to represent low, moderate, high, and extreme weather days for each weather influence zone in the South. A weather influence zone is an area where, for analysis purposes, the weather on any given day is considered uniform.

The fire intensity scale map is derived at a 30-meter resolution. This scale of data was chosen to be consistent with the accuracy of the primary surface fuels dataset used in the assessment. While not appropriate for site specific analysis, it is appropriate for regional, county or local planning efforts.

Class		Acres	Percent
	Non-Burnable	33,979	10.5 %
1	Lowest Intensity	12,769	4.0 %
1.5		127,199	39.4 %
2	Low	26,714	8.3 %
2.5		59,629	18.5 %
3	Moderate	10,737	3.3 %
3.5		36,883	11.4 %
4	High	14,590	4.5 %
4.5		4	0.0 %
5	Highest Intensity	0	0.0 %
Total		322,504	100.0 %

Carroll County Characteristic Fire Intensity Scale

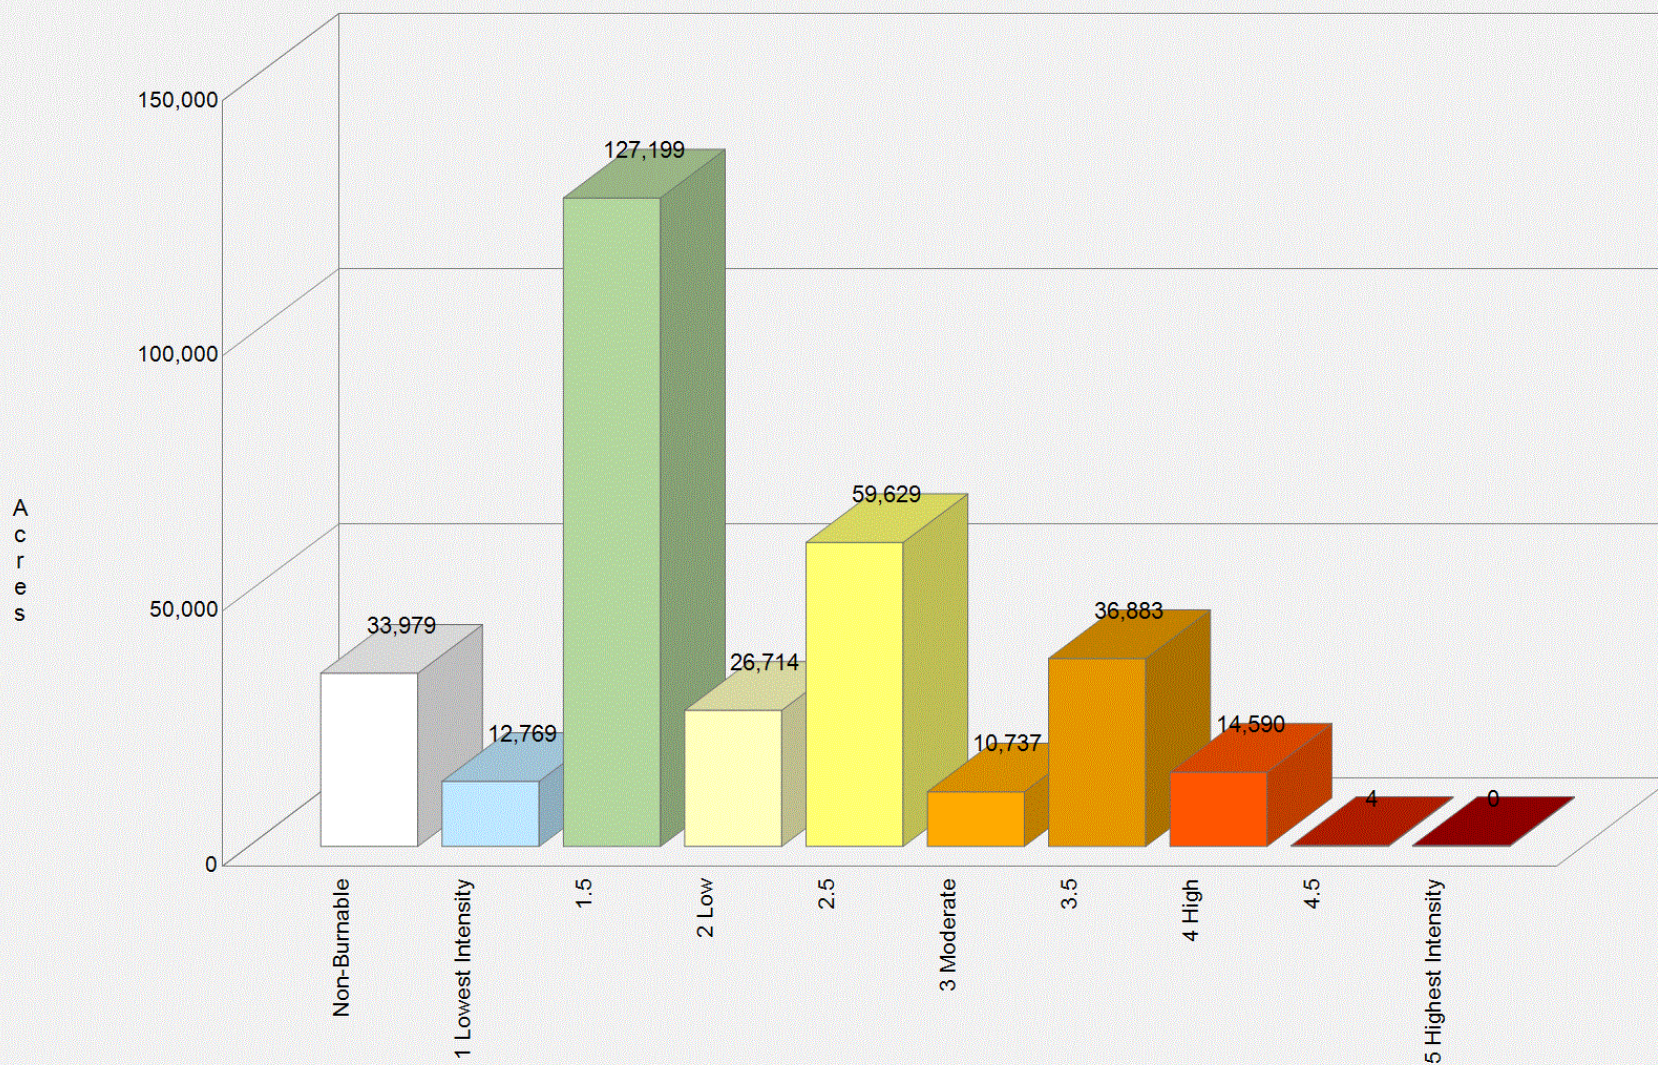


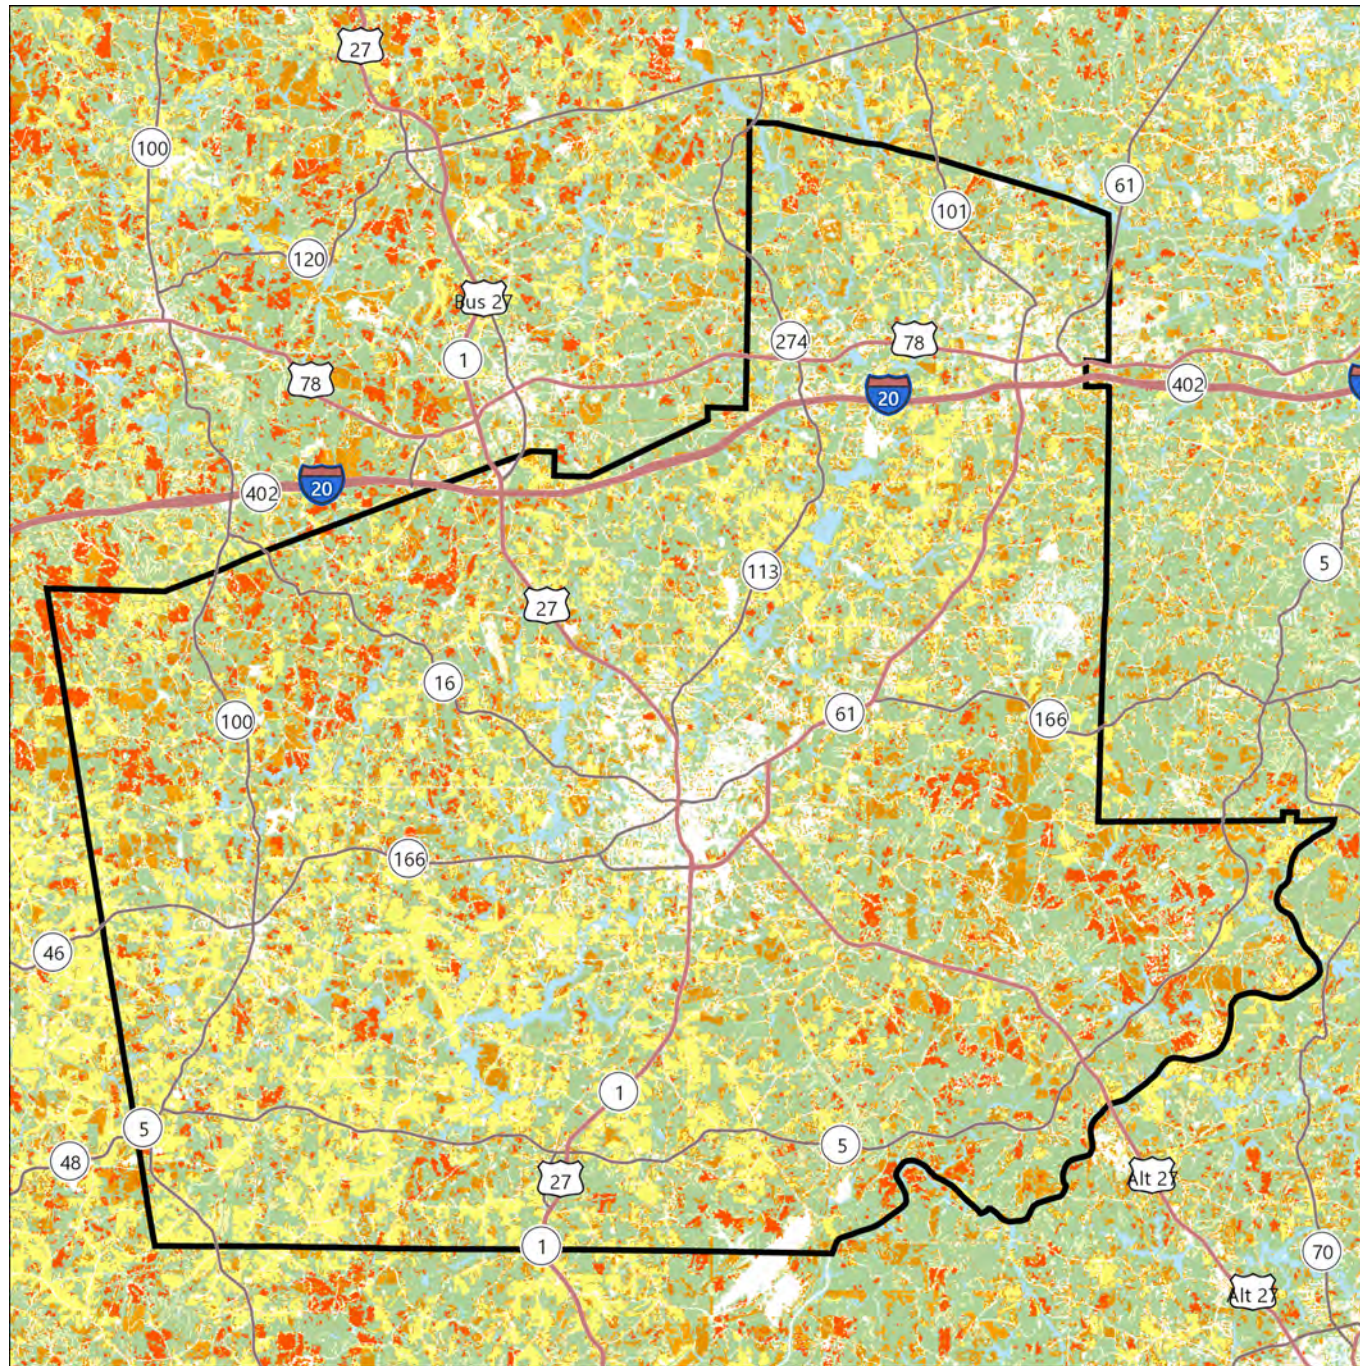

Carroll County

Fire Intensity Scale

- 1 - Lowest Intensity
- 1.5
- 2 - Low
- 2.5
- 3 - Moderate
- 3.5
- 4 - High
- 4.5
- 5 - Highest Intensity



Southern Wildfire Risk Assessment
<https://southernwildfirerisk.com/>

Fire Type – Extreme

Description

There are two primary fire types – surface fire and canopy fire. Canopy fire can be further subdivided into passive canopy fire and active canopy fire. A short description of each of these is provided below.

Surface Fire

A fire that spreads through surface fuel without consuming any overlying canopy fuel. Surface fuels include grass, timber litter, shrub/brush, slash and other dead or live vegetation within about 6 feet of the ground.

Passive Canopy Fire

A type of crown fire in which the crowns of individual trees or small groups of trees burn, but solid flaming in the canopy cannot be maintained except for short periods (Scott & Reinhardt, 2001).

Active Canopy Fire

A crown fire in which the entire fuel complex (canopy) is involved in flame, but the crowning phase remains dependent on heat released from surface fuel for continued spread (Scott & Reinhardt, 2001).



Fire Type – Extreme represents the potential fire type under the extreme percentile weather category. The extreme percentile weather category represents the average weather based on the top three percent fire weather days in the analysis period. It is not intended to represent a worst case scenario weather event. Accordingly, the potential fire type is based on fuel conditions, extreme percentile weather, and topography.


Canopy fires are very dangerous, destructive and difficult to control due to their increased fire intensity. From a planning perspective, it is important to identify where these conditions are likely to occur on the landscape so that special preparedness measure can be taken if necessary. The Fire Type – Extreme layer shows the footprint of where these areas are most likely to occur. However, it is important to note that canopy fires are not restricted to these areas. Under the right conditions, it can occur in other canopied areas.


For all Southern states, except Florida and Texas, this dataset was derived from updated fuels and canopy data as part of the 2010 SWRA Update Project recently completed in May 2014. For Texas, the 2010 Texas risk update data is portrayed. For Florida, the 2010 Florida risk assessment update data is shown.

The fire type - extreme map is derived at a 30-meter resolution. This scale of data was chosen to be consistent with the accuracy of the primary surface fuels dataset used in the assessment. While not appropriate for site specific analysis, it is appropriate for regional, county or local planning efforts.

	Fire Type	Acres	Percent
	Non-Burnable	33,937	10.5 %
	Surface Fire	269,866	83.7 %
	Passive Canopy	18,381	5.7 %
	Active Canopy	321	0.1 %
	Total	322,505	100.0 %

Carroll County
Fire Type - Extreme

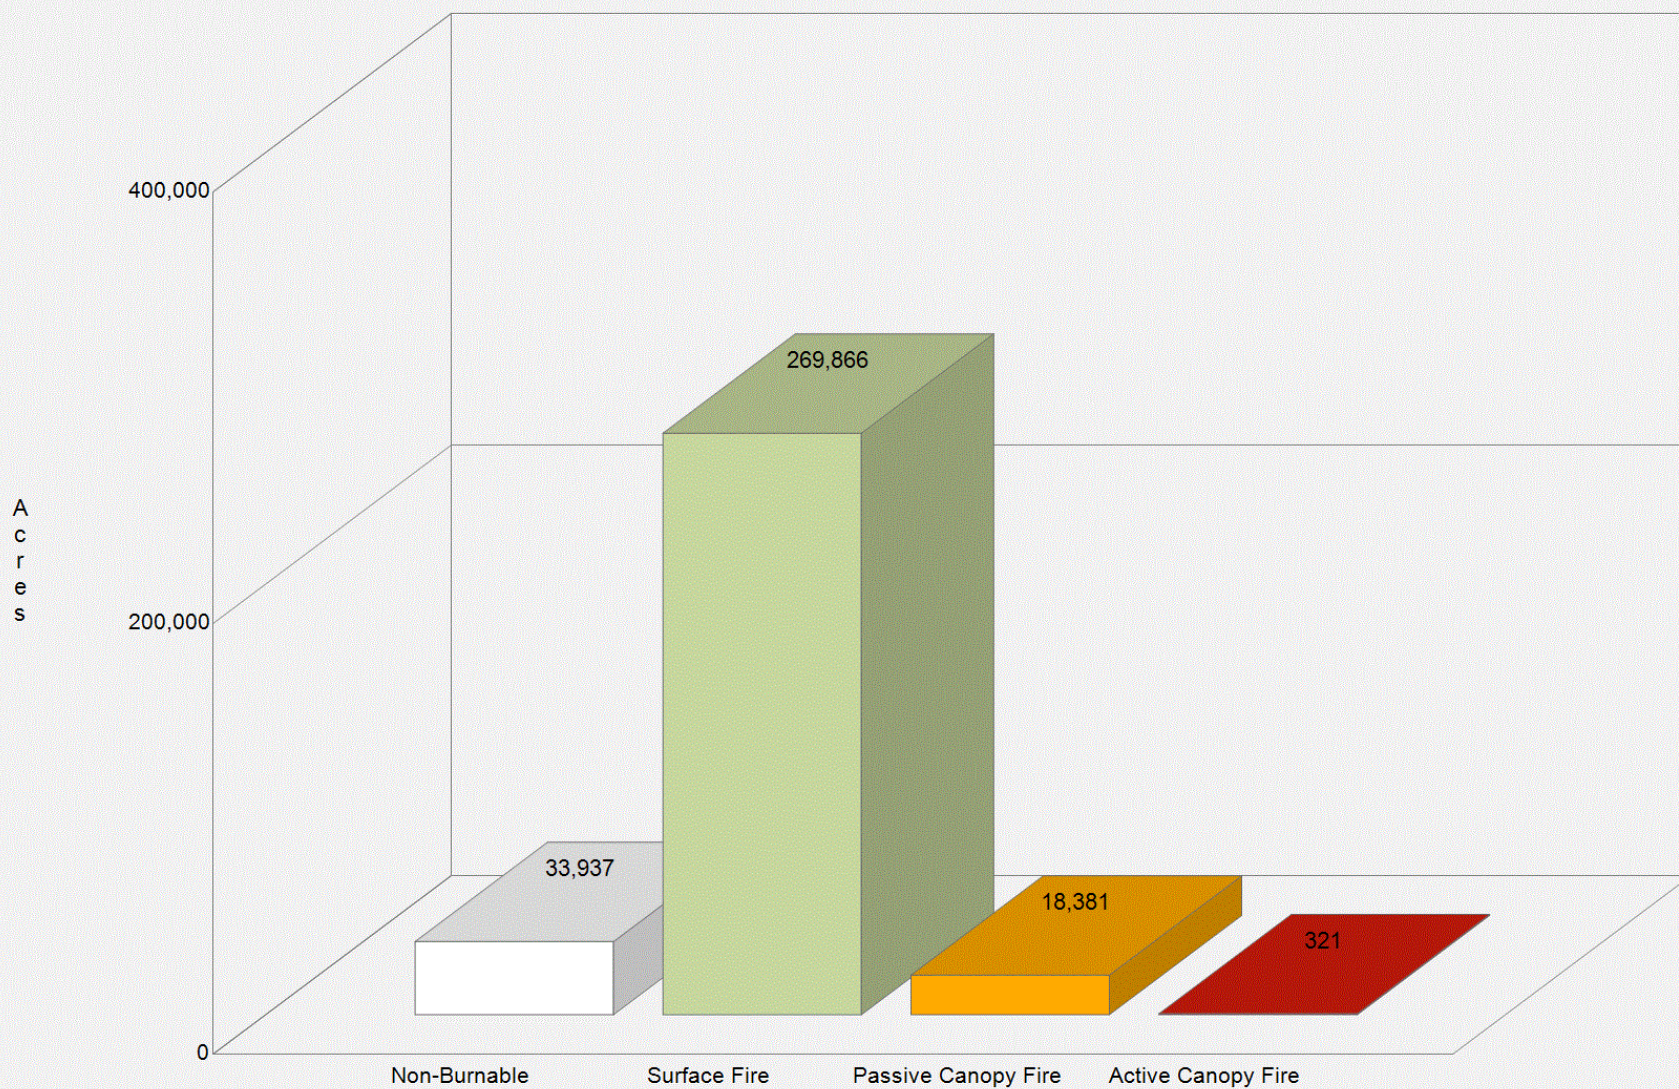

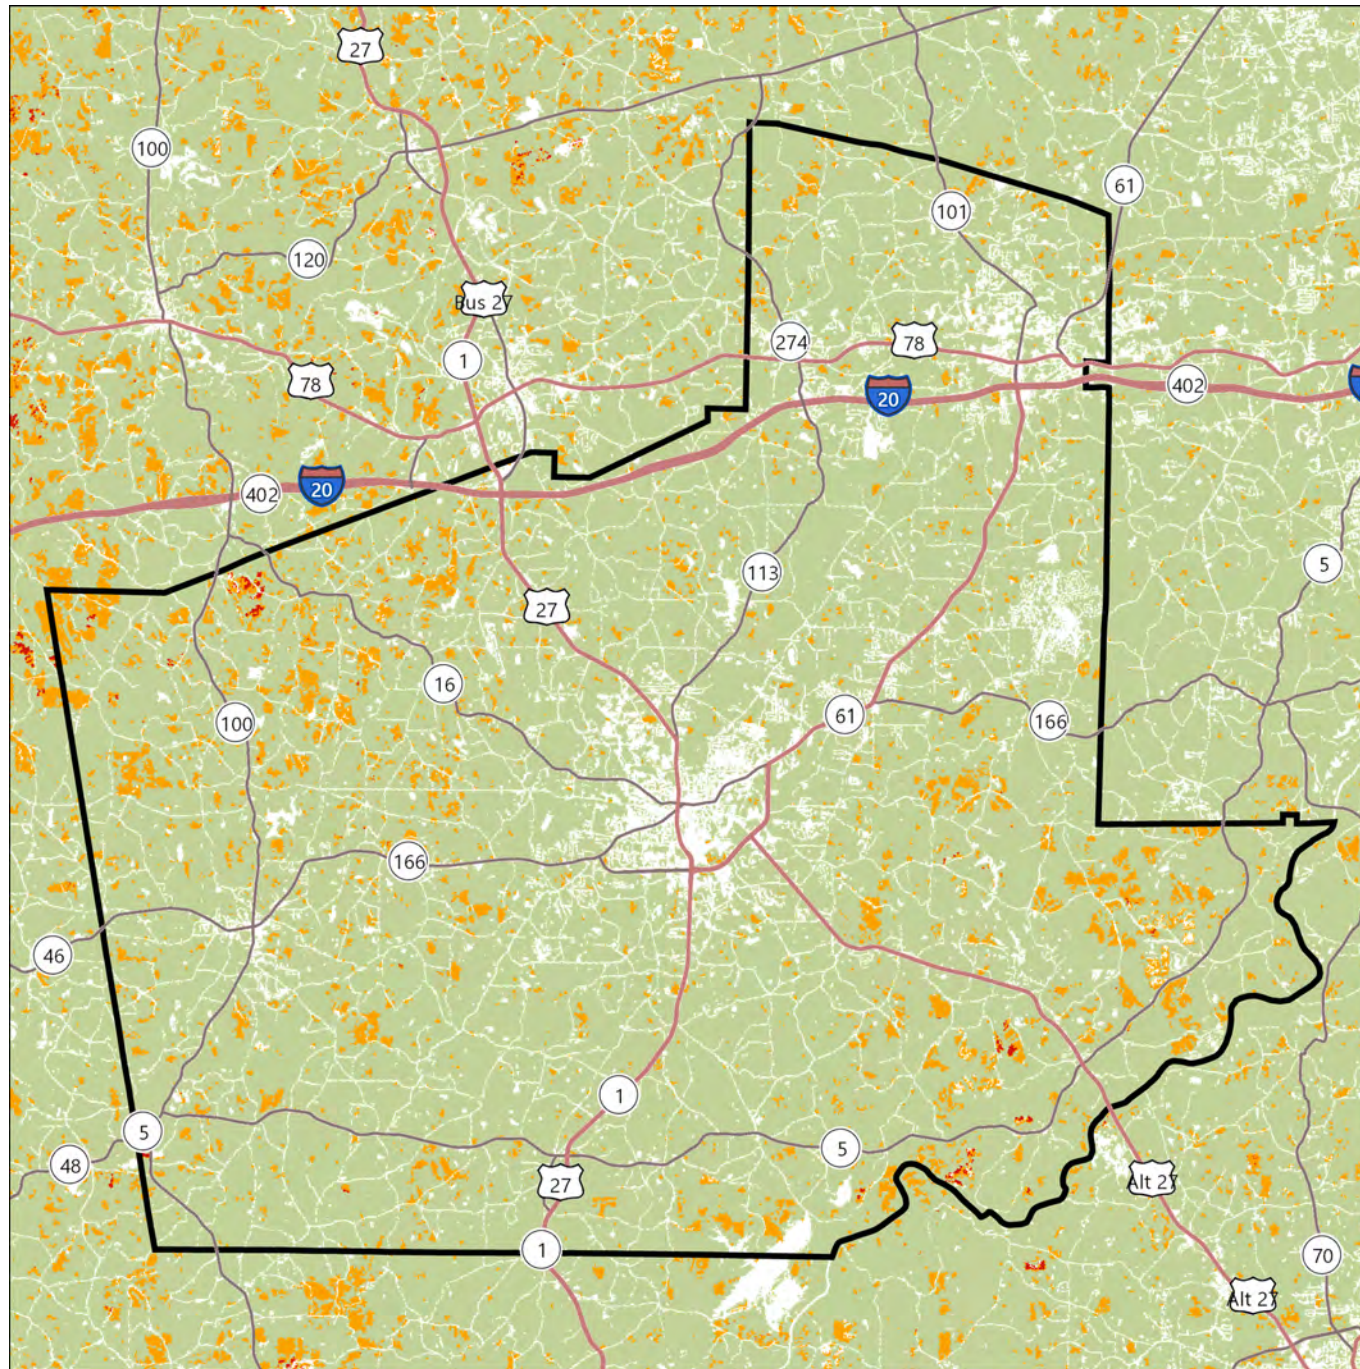

Carroll County

Fire Type

Extreme Weather Percentile

- Surface Fire
- Passive Canopy Fire
- Active Canopy Fire

6.59 mi
14139.5 m



Southern Wildfire Risk Assessment
<https://southernwildfirerisk.com/>

Surface Fuels

Description

Surface fuels, or fire behavior fuel models as they are technically referred to, contain the parameters needed by the Rothermel (1972) surface fire spread model to compute surface fire behavior characteristics, such as rate of spread, flame length, fireline intensity, and other fire behavior metrics. As the name might suggest, surface fuels only account for the surface fire potential. Canopy fire potential is computed through a separate but linked process. The Southern Wildfire Risk Assessment accounts for both surface and canopy fire potential in the fire behavior outputs.

Surface fuels are typically categorized into one of four primary fuel types based on the primary carrier of the surface fire: 1) grass, 2) shrub/brush, 3) timber litter and 4) slash. There are two standard fire behavior fuel model sets published for use. The Fire Behavior Prediction System 1982 Fuel Model Set (Anderson, 1982) contains 13 fuel models and the Fire Behavior Prediction System 2005 Fuel Model Set (Scott & Burgan 2005) contains 40 fuel models.

The SWRA Surface Fuels have been updated to use the FBPS 2005 40 fuel model set from the LANDFIRE 2010 products, supplemented with additional enhancements obtained through calibration workshops with the Southern states. Florida uses FBPS 1982 fuel models derived based on spectral classification of Landsat Thematic Mapper (TM) satellite imagery derived as part of the Florida Forest Service fuels mapping and risk assessment projects. Texas fuels represent 2010 updates conducted as part of a statewide fuels and canopy mapping effort.

For the remaining 11 Southern states, the recently completed SWRA Update project produced a new surface fuels dataset based on 2010 LANDFIRE products. A detailed fuels calibration process was undertaken that involved collaboration with Southern state fuels and fire behavior specialists supported by federal partner involvement. Workshops were held to review the LANDFIRE fuels product and calibrate the data by modifying specific fuels classes to better reflect local knowledge and input. A key component of this calibration task involved using image processing techniques to better delineate conifer areas, and in particular pine areas (plantations and natural stands). The fuels layer represents 2010 conditions.


Surface Fuel		FBPS Fuel Model Set	Description	Acres	Percent
Grass Fuels Type Models (nearly pure grass and/or forb type)					
	GR01	2005	Grass is short, patchy, and possibly heavily grazed. Spread rate moderate; flame length low.	3,970	1.2 %
	GR02	2005	Moderately coarse continuous grass, average depth about 1 foot. Spread rate high; flame length moderate.	1,930	0.6 %
	GR03	2005	Very coarse grass, average depth about 2 feet. Spread rate high; flame length moderate.	15,865	4.9 %
	GR04	2005	Moderately coarse continuous grass, average depth about 2 feet. Spread rate very high; flame length high.	0	0.0 %
	GR05	2005	Dense, coarse grass, average depth about 1 to 2 feet. Spread rate very high; flame length high.	4,365	1.4 %
	GR06	2005	Dryland grass about 1 to 2 feet tall. Spread rate very high; flame length very high.	0	0.0 %
	GR08	2005	Heavy, coarse, continuous grass 3 to 5 feet tall. Spread rate very high; flame length very high.	0	0.0 %
	GR09	2005	Very heavy, coarse, continuous grass 5 to 8 feet tall. Spread rate extreme; flame length extreme.	0	0.0 %
Grass-Shrub Fuels Type Models (mixture of grass and shrub, up to 50 percent shrub coverage)					
	GS01	2005	Shrubs are about 1 foot high, low grass load. Spread rate moderate; flame length low.	2,616	0.8 %
	GS02	2005	Shrubs are 1 to 3 feet high, moderate grass load. Spread rate high; flame length moderate.	5,933	1.8 %
	GS03	2005	Moderate grass/shrub load, average grass/shrub depth less than 2 feet. Spread rate high; flame length moderate.	8,753	2.7 %
	GS04	2005	Heavy grass/shrub load, depth greater than 2 feet. Spread rate high; flame length very high.	0	0.0 %
Shrub Fuel Type Models (Shrubs cover at least 50 percent of the site, grass sparse to nonexistent)					
	SH01	2005	Low shrub fuel load, fuelbed depth about 1 foot; some grass may be present. Spread rate very low; flame length very low.	0	0.0 %
	SH02	2005	Moderate fuel load (higher than SH01), depth about 1 foot, no grass fuel present. Spread rate low; flame length low.	0	0.0 %
	SH03	2005	Moderate shrub load, possibly with pine overstory or herbaceous fuel, fuel bed depth 2 to 3 feet. Spread rate low; flame length low.	32	0.0 %
	SH04	2005	Low to moderate shrub and litter load, possibly with pine overstory, fuel bed depth about 3 feet. Spread rate high; flame length moderate.	0	0.0 %


Surface Fuel	FBPS Fuel Model Set	Description	Acres	Percent
SH05	2005	Heavy shrub load, depth 4 to 6 feet. Spread rate very high; flame length very high.	0	0.0 %
SH06	2005	Dense shrubs, little or no herb fuel, depth about 2 feet. Spread rate high; flame length high.	50	0.0 %
SH07	2005	Very heavy shrub load, depth 4 to 6 feet. Spread rate lower than SH05, but flame length similar. Spread rate high; flame length very high.	4,727	1.5 %
SH08	2005	Dense shrubs, little or no herb fuel, depth about 3 feet. Spread rates high; flame length high.	0	0.0 %
SH09	2005	Dense, finely branched shrubs with significant fine dead fuel, about 4 to 6 feet tall; some herbaceous fuel may be present. Spread rate high, flame length very high.	34	0.0 %
Timber-Understory Fuel Type Models (Grass or shrubs mixed with litter from forest canopy)				
TU01	2005	Fuelbed is low load of grass and/or shrub with litter. Spread rate low; flame length low.	385	0.1 %
TU02	2005	Fuelbed is moderate litter load with shrub component. Spread rate moderate; flame length low.	10,169	3.2 %
TU03	2005	Fuelbed is moderate litter load with grass and shrub components. Spread rate high; flame length moderate.	32	0.0 %
TU05	2005	Fuelbed is high load conifer litter with shrub understory. Spread rate moderate; flame length moderate.	1	0.0 %
Timber Litter Fuel Type Models (dead and down woody fuel litter beneath a forest canopy)				
TL01	2005	Light to moderate load, fuels 1 to 2 inches deep. Spread rate very low; flame length very low.	67	0.0 %
TL02	2005	Low load, compact. Spread rate very low; flame length very low.	10,167	3.2 %
TL03	2005	Moderate load conifer litter. Spread rate very low; flame length low.	2,208	0.7 %
TL04	2005	Moderate load, includes small diameter downed logs. Spread rate low; flame length low.	0	0.0 %
TL05	2005	High load conifer litter; light slash or mortality fuel. Spread rate low; flame length low.	379	0.1 %
TL06	2005	Moderate load, less compact. Spread rate moderate; flame length low.	138,639	43.0 %
TL08	2005	Moderate load and compactness may include small amount of herbaceous load. Spread rate moderate; flame length low.	1,455	0.5 %

Surface Fuel	FBPS Fuel Model Set	Description	Acres	Percent
TL09	2005	Very high load broadleaf litter; heavy needle-drape in otherwise sparse shrub layer. Spread rate moderate; flame length moderate.	981	0.3 %
Slash-Blowdown Fuel Type Models (activity fuel/slash or debris from wind damage)				
SB01	2005	Low load activity fuel. Spread rate moderate; flame length low.	0	0.0 %
SB02	2005	Moderate load activity or low load blowdown. Spread rate moderate; flame length moderate.	0	0.0 %
SB03	2005	High load activity fuel or moderate load blowdown. Spread rate high; flame length high.	0	0.0 %
Custom Fuel Type Models (all states except Florida)				
9PPL	Custom	Long-needle (pine litter, plantations) with a high load	16,101	5.0 %
GR01h	Custom	Pasture and hayland	58,371	18.1 %
Non-burnable Fuel Type Models (insufficient wildland fuel to carry a wildland fire under any condition)				
NB01	2005	Urban or suburban development; insufficient wildland fuel to carry wildland fire. Includes roads.	27,958	8.7 %
NB03	2005	Agricultural field, maintained in nonburnable condition.	519	0.2 %
NB08	2005	Open water	4,780	1.5 %
NB09	2005	Bare ground	2,014	0.6 %
1982 Fire Behavior Prediction System – ONLY USED FOR FLORIDA ASSESSMENT				
FM 1	1982	Short grass	0	0.0 %
FM 2	1982	Timber grass and understory	0	0.0 %
FM 3	1982	Tall grass	0	0.0 %
FM 4	1982	Chaparral	0	0.0 %

	Surface Fuel	FBPS Fuel Model Set	Description	Acres	Percent
	FM 5	1982	Brush	0	0.0 %
	FM 6	1982	Dormant brush	0	0.0 %
	FM 7	1982	Southern rough	0	0.0 %
	FM 8	1982	Compact timber litter	0	0.0 %
	FM 9	1982	Hardwood litter	0	0.0 %
	FM 10	1982	Timber (understory)	0	0.0 %
	FM 11	1982	Light logging slash	0	0.0 %
	FM 12	1982	Medium logging slash	0	0.0 %
				322,501	100.0 %

Carroll County Surface Fuels

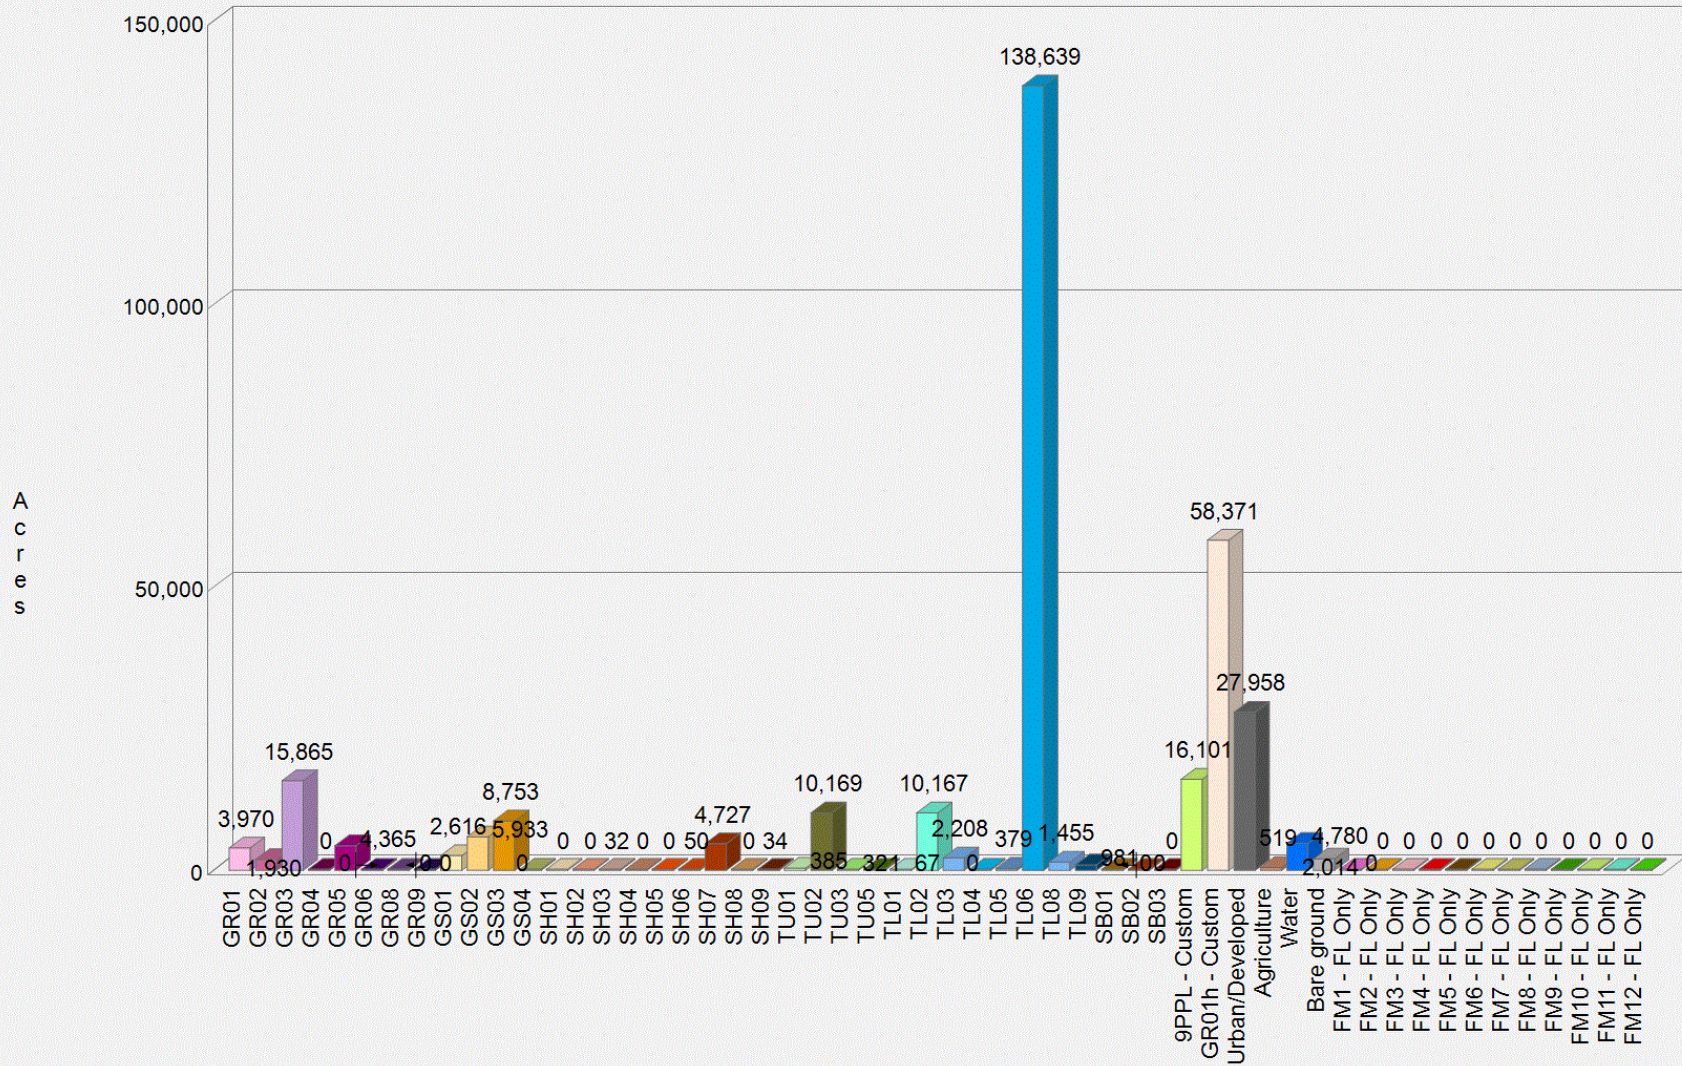

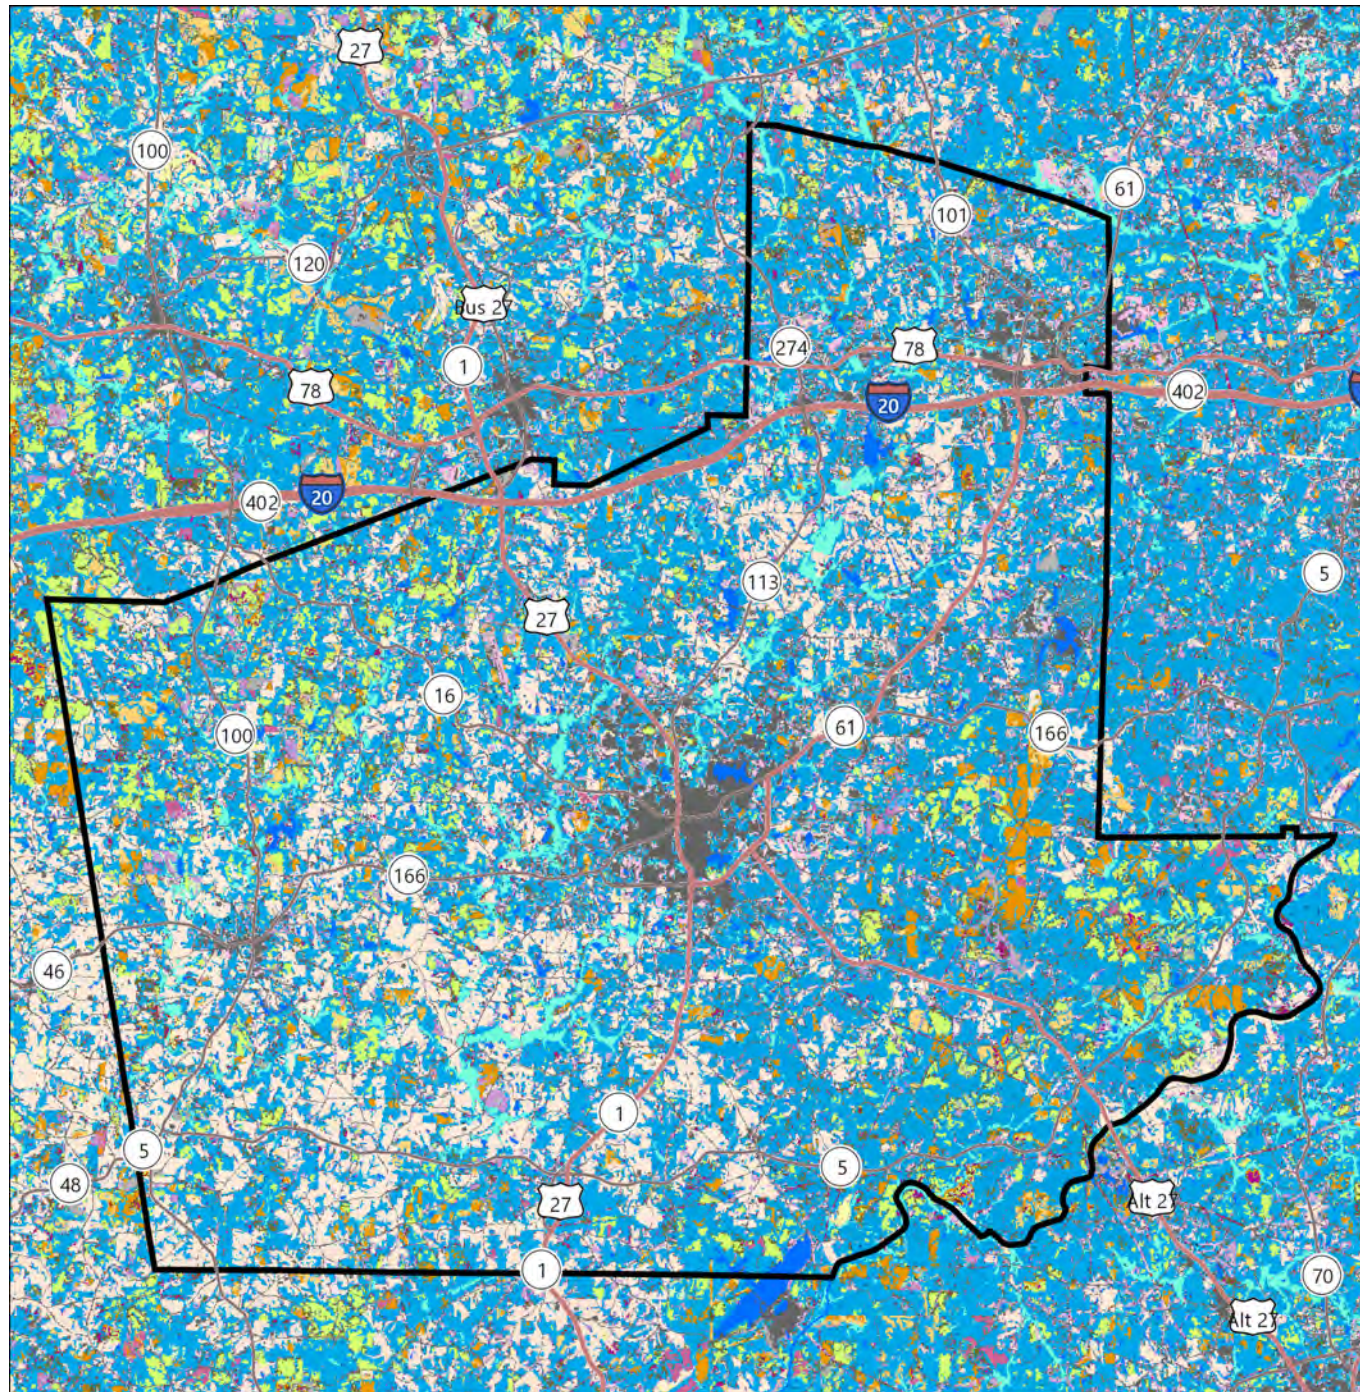

Carroll County

Surface Fuels

GR01	TU01	FM1
GR02	TU02	FM2
GR03	TU03	FM3
GR04	TU05	FM4
GR05	TL01	FM5
GR06	TL02	FM6
GR08	TL03	FM7
GR09	TL04	FM8
GS01	TL05	FM9
GS02	TL06	FM10
GS03	TL08	FM11
GS04	TL09	FM12
SH01	SB01	GR1h
SH02	SB02	9PPL
SH03	SB03	9HWD
SH04	Urban/Developed	
SH05	Agriculture	
SH06	Water	
SH07	Bare ground	
SH08		
SH09		

6.59 mi
14139.5 m



Southern Wildfire Risk Assessment
<https://southernwildfirerisk.com/>


Dozer Operability Rating


Description

The Dozer Operability Rating (DOR) expresses how difficult it is to operate a dozer in an area based on limitations associated with slope and vegetation/fuel type. Using the fireline production rates published in the NWCG Fireline Handbook 3 (PMS 410-1) as a guide, operability values were assigned to a matrix based on 6 slope classes and 10 vegetation/fuels classes. The possible values range from 1 to 9, with 1 representing no limitations and 9 being inoperable.

	Class	Acres	Percent
	1 (No Expected Limitations)	83,421	26.3 %
	2 (Slight)	29,908	9.4 %
	3 (Slight to Moderate)	20,722	6.5 %
	4 (Moderate)	146,241	46.0 %
	5 (Moderate to Significant)	35,530	11.2 %
	6 (Significant)	1,796	0.6 %
	7 (Significant to Severe)	125	0.0 %
	8 (Severe)	0	0.0 %
	9 (Inoperable)	0	0.0 %
	Total	317,743	100.0 %

Carroll County Dozer Operability Rating

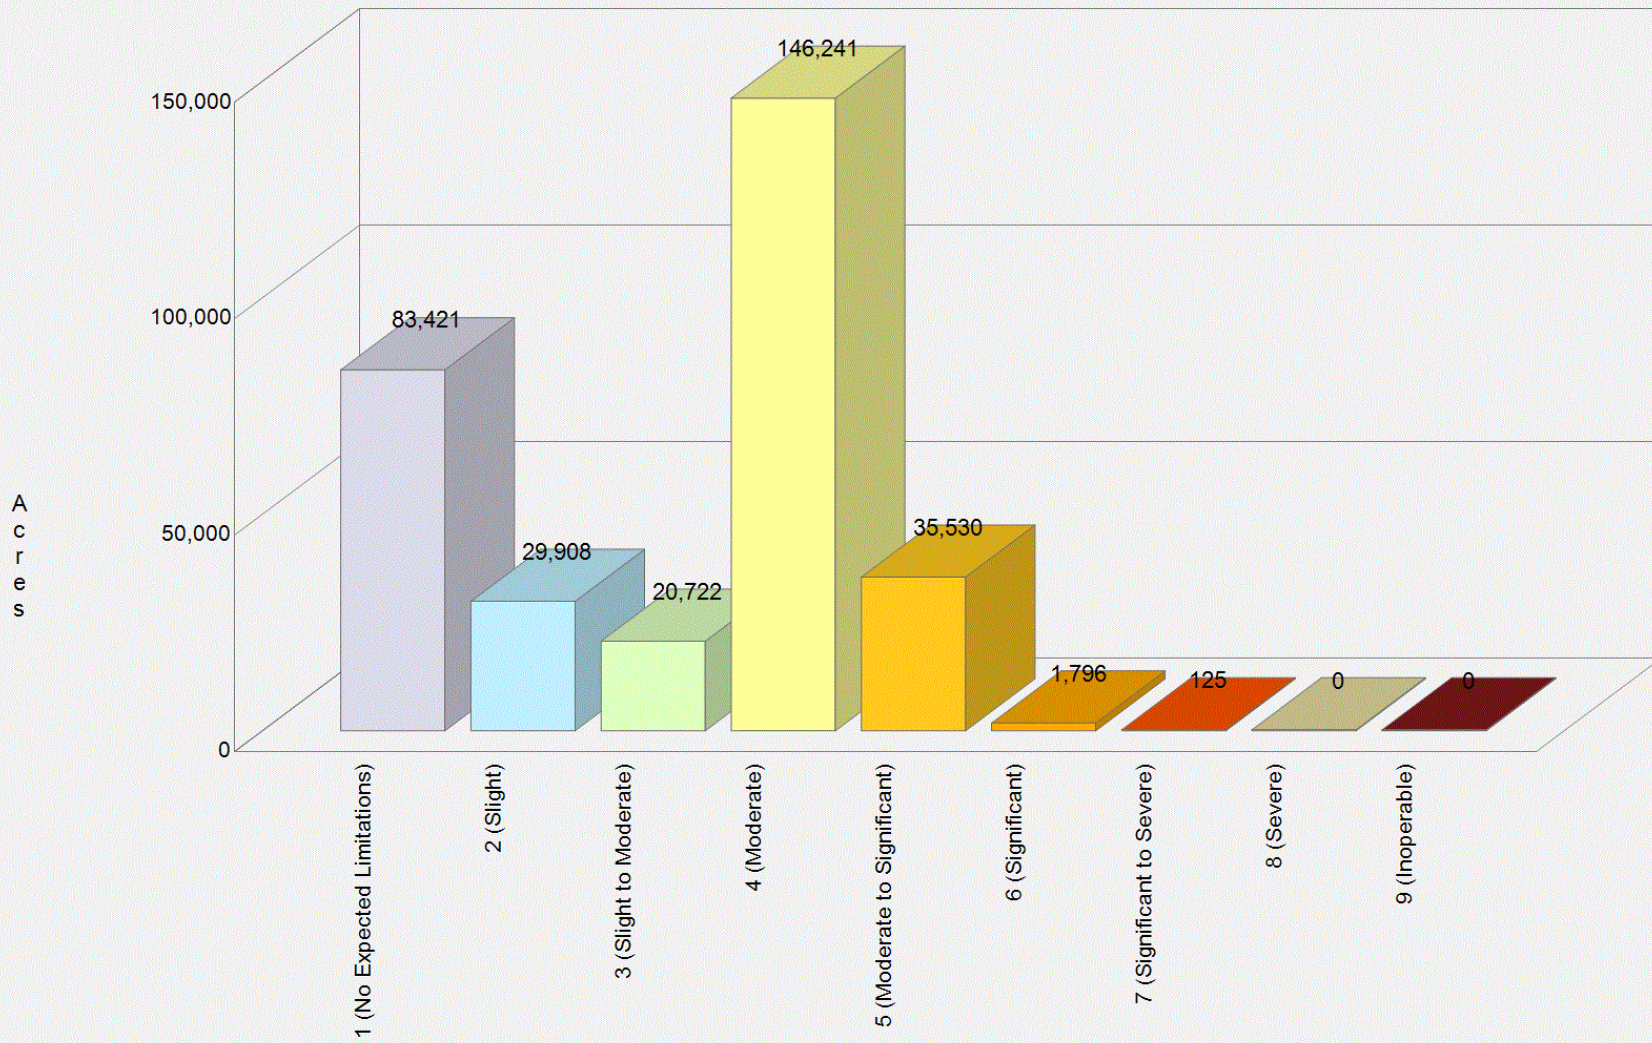

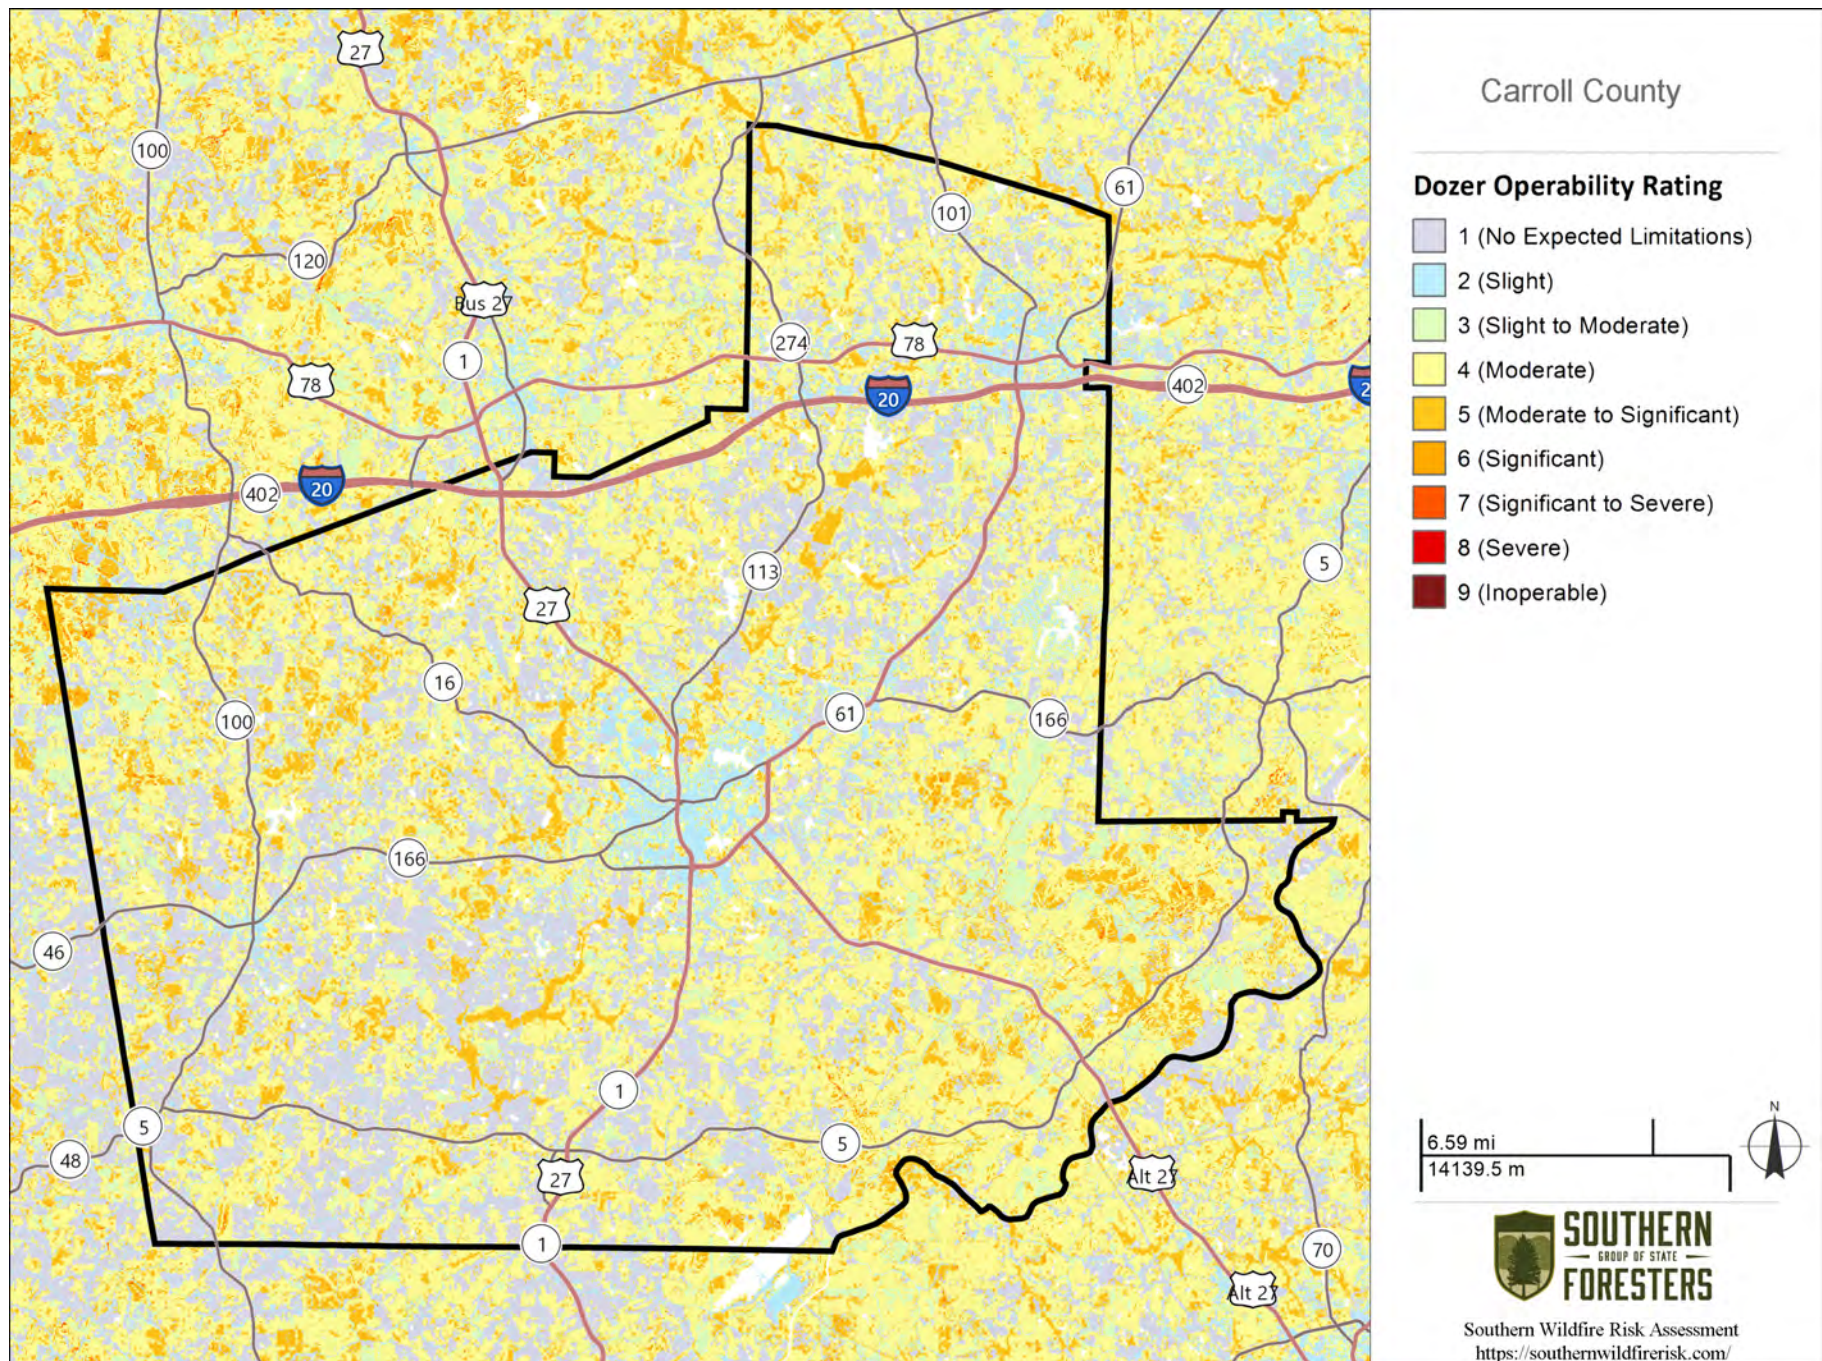

References

Anderson, H. E. (1982). Aids to determining fuel models for estimating fire behavior. USDA For. Serv. Gen. Tech. Rep. INT-122.

Dobson, J. E., E. A. Bright, P. R. Coleman, and B.L. Bhaduri. "LandScan: a global population database for estimating populations at risk. "Remotely Sensed Cities Ed. V. Mesev, London: Taylor & Francis. 2003. 267-281.

Fire Program Analysis (FPA) System and US Forest Service Missoula Fire Sciences Laboratory, 20140307, Burn Probabilities for the Conterminous US (270-m GRID) from Calibrated FSim Runs for the 2014 FPA Submissions [bp_20140307];, Fire Program Analysis (FPA) System, National Interagency Fire Center, Boise, ID.

National Wildfire Coordinating Group (NWCG). (2008). Glossary of Wildland Fire Terminology. Publication Management System document PMS-205.

Radeloff, V.C., R.B. Hammer, S.I Stewart, J.S. Fried, S.S. Holcomb, and J.F. McKeefry. 2005. The Wildland Urban Interface in the United States. Ecological Applications 15: 799-805

Scott, J. H., & Burgan, R. E. (2005). Standard Fire Behavior Fuel Models: A Comprehensive Set for Use with Rothermel's Surface Fire Spread Model. Ft. Collins, CO, Rocky Mountain Research Station: USDA Forest Service, Gen. Tech. Rpt. RMRS-GTR-153.

Scott, J. H., & Reinhardt, E. D. (2001). Assessing the Crown Fire Potential by Linking Models of Surface and Crown Fire Behavior. Ft. Collins, CO, Rocky Mountain Research Station: USDA Forest Service, Research Paper RMRS-RP-29.

Scott, Joe. November 2006. Off the Richter: Magnitude and Intensity Scales for Wildland Fire. A non-published white paper prepared for the AFE Fire Congress, November 2006, San Diego, CA.

Thompson, M. P., D. E. Calkin, M. A. Finney, A. A. Ager, and J. W. Gilbertson-Day. 2011. Integrated National-Scale Assessment of Wildfire Risk to Human and Ecological Values. Stochastic Environmental Research and Risk Assessment 25:761-780.

More information about the Fire Program Analysis project is available from <http://www.forestsandrangelands.gov/WFIT/applications/FPA/index.shtml>

More information about the Oak Ridge National Laboratory LandScan data is available from http://web.ornl.gov/sci/landscan/landscan_documentation.shtml

More information about the U.S. Forest Service SILVIS data is available from http://silvis.forest.wisc.edu/maps/wui_main



SOUTHERN GROUP OF STATE FORESTERS WILDFIRE RISK ASSESSMENT PORTAL